
<b>—</b>	۵	п	m	D	0





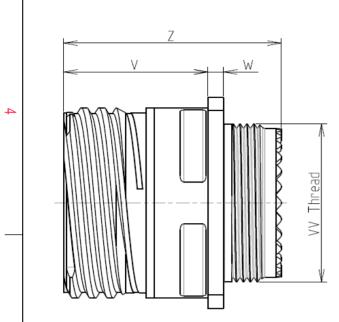

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
N	-Shell Plating	: Passivated			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	• -65°C to +200°C			
		•			
	-Salt Spray	: 500 hours			

: 24.03 g ± 10%

8D 0

G

09

Κ

98

S

F

B L

Dim	Nominal
Р	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M12x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 09-98

CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : B** 



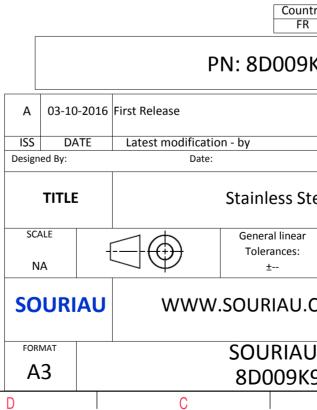

	σ		А			
					4	
AS EXA	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third part			2	
	1			MOD N°	<u> </u>	
Stee	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT 859					
				perty of	1	
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
к98	BSBL-C	1		1/2	J	
	В		А			

r	Ŧ	۵	г П	m		0
		Contact Layout				Panel Cutou
4	-X					SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numb size 9 -98 3	n X-axis Y-axis (mm) (mm) +.065 (1.65) +.038 (0.97) +.000 (0.00)075 (1.91) 065 (1.65) +.038 (0.97) er of Size Service Contact Supersedes tcts contacts rating location				ØT.
ى ى						Dim ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat
C						PN: 8D009K
					A 03-10-20 ISS DATE Designed By:	D16 First Release Latest modification - by Date:
					SCALE	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D009K9
	Н	G	F	E	D	C

