
工	G	ш	m	0





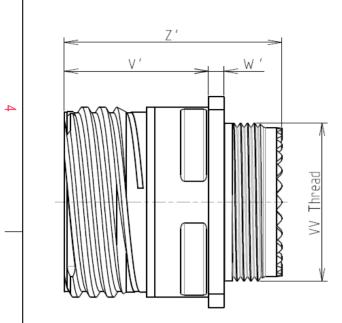

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

Н

ယ


-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite				
N	-Shell Plating	: Nickel				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
	-Durability	: 500 Mating cycles				
	-Delivered without Souriau contacts					
	-Temperature Range	65°C to +200°C				
	-Salt Spray	: 2000 hours				

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	5.49±0.2			
R1	18.26			
R2	15.09			
S	23.8±0.3			
V'	19.5+1.4/-0			
W'	2.1/3.65			
Z'	32 Max			
VV THREAD	M12x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

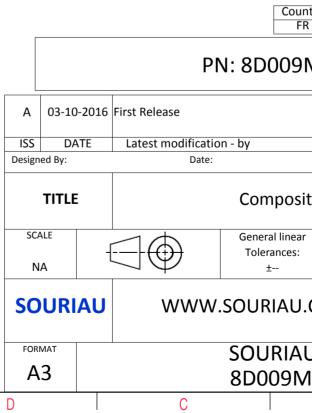

-Temperature Range	: -65°C to +200°C									
-Salt Spray	: 2000 hours									
-Mass	: 7.9 g ± 10%									
BASIC SERIES:	8D	0	-	09	М	98	S	Ν	L	
SHELL TYPE : Square Flange Receptacle								Delivered W/O Contacts		
CONTACT TYPE : Sta	ndard Crimp Contact	:	_							ORIENTATION : N
SHELL SIZE : 09				-						CONTACT TYPE : SOCKET(500 Matings)
PLATING : M = Nickel								CONTACT LAYOUT : 09-98		

F

G

	Ξ		A				
A		8			4		
S EX4	AMPLE				3		
whic er of t	non-conformit ch does not co he Parties or t on, technical no Jurisd	mply with by a third part			2		
9M9	98SNL						
				MOD N°			
ite	customer drawing						
ar	NPRDS / PROJECT 859						
I.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N° 8SNL-C			SHEET 1/2			
	B		A		J		

-	Ŧ	۵	ار (m	D	0	
		Contact Layout					Panel Cutou
4	-X <u></u>				A	SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
	Conta positio ID A B C C Shell Arrangement Numb size no. conta 9 -98 3	n X-axis Y-axis (mm) (mm) +0.65 (1.65) +0.38 (0.97) +0.00 (0.00) -0.75 (1.91) -0.65 (1.65) +0.38 (0.97) er of Size Service Contact Supersedes acts contacts rating location			¥ 25		ØT
ω						ې م ۱	im ðA AA R1 ðT
	L						
						SOURIAU shall not b due to a use of th the Specifications issu (professional	e Products wh ed by either o recommendat
N						PN: 8	Countr FR 8D009N
_					A 03-10-20 ISS DATE Designed By:	16 First Release Latest modification - b Date:	У
					TITLE		Composite
<u> </u>					NA		General linear Tolerances: ±
					SOURIA	J WWW.SO	URIAU.C
					FORMAT A3		DURIAU
L	Н	G	F	E	D	C	

