

Ξ	G	П	m	O



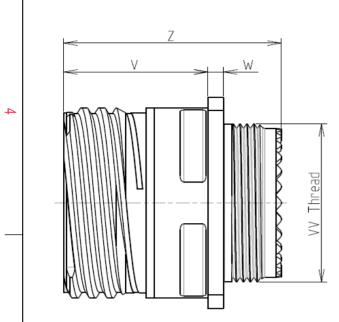

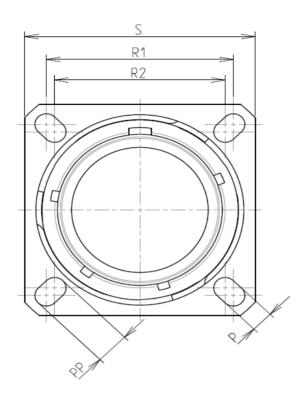

Keying Shown as example

Connector dimension

Nominal

Dim

CHARACTERISTICS

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Stanuaru . Baseu on r	/IIC-DIC-20222 261162 III				Dilli	Nominal					
\leq		: Stainless Steel				Р	3.25±0.2	_			COUDIAL chal	l not be liable for an
	-Shell Plating	: Nickel				PP	5.49±0.2	_				e of the Products wi
						R1 R2	18.26 15.09	_				ns issued by either o
	-Insulator	: Thermoplastic				S RZ	23.8±0.3	-			•	sional recommenda
	-Contacts	: Copper Alloy				V	20.83+0/-1.25	-			(p. 0.00	
	-Seals & Grommet	: Silicon Elastomer				Ŵ	2.1/2.5	-				Count
\sim	-Contact Plating	: Gold over copper Alloy 0.8µm	minimum			Z	31.5 Max					FR
	-Durability	: 500 Mating cycles				VV THREAD	M12x1-6g		Γ			
	-Delivered without So											PN: 8D0095
	-Temperature Range	: -65°C to +200°C							Α	03-10-2016	First Delegas	
	-Salt Spray	: 500 hours							A	03-10-2010	FILST Release	
	-Mass	: 24.03 g ± 10%							ISS	DATE	Latest modificat	ion - by
		0							Design	ed By:	Date	:
										TITLE		Stainless Sto
	BASIC SERIES:	8D 0 -	09 S	98	S N	L			SC/	ALE r	$\neg \phi$	General linear
							Deltarada		N	, †	$\neg \Theta$	Tolerances:
-	SHELL TYPE : Square	Flange Receptacle					Delivered v	V/O Contacts		A	\rightarrow	±
	CONTACT TYPE : Sta	ndard Crimp Contact					ORIE	NTATION : N	60	URIAU		.SOURIAU.C
	SHELL SIZE : 09		•			CONT	ACT TYPE : SOCKET(EOO Matings)	30	UNIAU		V.300RIAU.C
						CONTA	ACT TIPE . SOCKET	500 Watings)				
	PLATING : S =	Nickel					CONTACT LA	YOUT : 09-98	FOR	MAT		SOURIAU
								1	A	3		8D009S9
	Н	G			F		E		D		С	
	П	i G	I		F	I			U	I	U	I
								w .				

Image: Second State Sta	0	ω		Þ		
LAYOUT SHOWN AS EXAMPLE NAU shall not be liable for any non-conformity or damage te to a use of the Products which does not comply with cifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) 2 <u>Country</u> Jurisdiction & Control List FR 2 <u>Date:</u> <u>Customer brawing</u> <u>Stainless Steel Receptacle 8D series</u> <u>t</u> MOD N° <u>SOURIAU.COM</u> This document is the property of <u>SOURIAU.COM</u> Inter <u>SOURIAU DRG N° <u>SOURIAU DRG N°</u> <u>SOURIAU DRG N°</u> <u>SHET</u> <u>1/2</u> <u>SHET</u> <u>1/2 </u></u>						4
a use of the Products which does not comply with b cifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)	LAYOUT SHOWN AS EX.	AMPLE				3
FR Not Listed 2 PN: 8D009S98SNL ase modification - by MOD N° Date: CUSTOMER DRAWING Stainless Steel Receptacle 8D series Ø General linear Tolerances: NPRDS / PROJECT # 859 1 WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission 1 SOURIAU DRG N° 8D009S98SNL-C SHEET 1/2 1/2	ue to a use of the Products white ecifications issued by either of (professional recommendation)	ch does not coi the Parties or b on, technical no	mply with by a third party otice.)	+		
ase modification - by MOD N° Date: CUSTOMER DRAWING Stainless Steel Receptacle 8D series Stainless Steel Receptacle 8D series General linear Tolerances: 859 ± NPRDS / PROJECT 859 This document is the property of SOURIAU it must not be reproduced or communicated without permission SOURIAU DRG N° SHEET 1/2		Julisu				2
modification - by MOD N° Date: CUSTOMER DRAWING Stainless Steel Receptacle 8D series Stainless Steel Receptacle 8D series Image: Steel Re	PN: 8D00959)8SNL				
CUSTOMER DRAWING Stainless Steel Receptacle 8D series General linear Tolerances: NPRDS / PROJECT ± 859 1 WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission 1 SOURIAU DRG N° 8D009S98SNL-C SHEET 1/2	ase					
General linear Tolerances: NPRDS / PROJECT ± 859 WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission SOURIAU DRG N° 8D009S98SNL-C SHEET 1/2	modification - by Date:		CUSTOMER DRA	WING	MOD N°	
Tolerances: 859 1 ± This document is the property of SOURIAU it must not be reproduced or communicated without permission SOURIAU DRG N° SHEET 1/2	Stainless Stee	el Recepta	cle 8D series			
SOURIAU.COM SOURIAU it must not be reproduced or communicated without permission SOURIAU DRG N° SHEET 8D009S98SNL-C 1/2	Tolerances:		859			1
8D009S98SNL-C 1/2	WWW.SOURIAU.CO	ЭМ	SOL it must not be	JRIAU e reproduced	or	
	8D009S98			Λ	1/2	
	0 1	D	I	A		

		G	г	m	D	0
		Contact Layout				Panel Cut
4	-×				A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positio ID A B C C Shell Arrangement Numb size no. conta 9 -98 3	n <u>X-axis Y-axis</u> (mm) (mm) +.065 (1.65) +.038 (0.97) +.000 (0.00)075 (1.91) 065 (1.65) +.038 (0.97) er of <u>Size</u> <u>Service</u> <u>Contact</u> Supersede location			R	ØT
ω						Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend
2						PN: 8D009
					ISS DATE Designed By:	16 First Release Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIAU	
		I			FORMAT A3	SOURIAU 8D009S
	Н	G	F	E	D	C

