
T 1	G		l m		
				_	





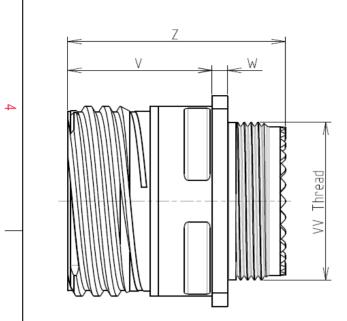

Keying Shown as example

ΙL

Е

CHARACTERISTICS

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Without Plating		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered without Souriau contacts			
-Temperature Range	-65°C to +175℃		
-Salt Spray	: 2000 hours		

: 7.9 g ± 10%

8D 0

G

09


Х

98

S

F

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	5.49±0.2	
R1	18.26	
R2	15.09	
S	23.8±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M12x1-6g	

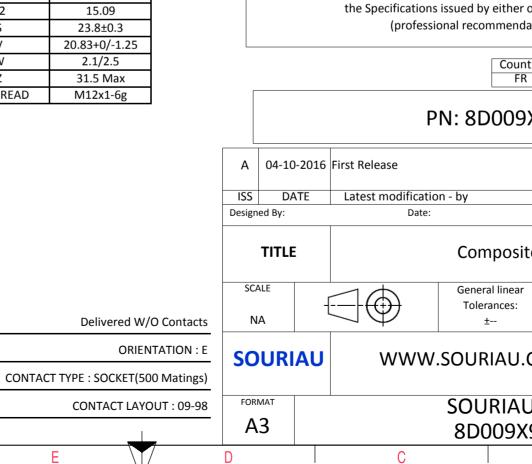



SHELL SIZE : 09

PLATING : X = Without Plating

Н

-Mass

0		Φ		Þ		1
						4
LAY	YOUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						2
PN: 8D009X98SEL						
rst Release						
Latest modificatio Date:	n - by		CUSTO	MER DRAWING	MOD N°	
Composite Receptacle 8D series						
$] \bigoplus$	General linear Tolerances: ±		NPRE	DS / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	SOURIAU I 8D009X98				SHEET	
С		B		A		J

r	<u>т</u>	۵	н Г	m	Ū	0	
		Contact Layout					Panel Cutou
4	-X					SQUARE FLANGE RECEPTACLE (TYPE C REAR MOUNTING	
	Shell Arrangement Numb size no. 100 30 30 30 30 30 30 30 30 30 30 30 30 3	X_axis Y_axis (mm) (mm) + 065 (1.65) + 0.38 (0.97) + 000 (0.00) - 0.75 (1.91) - 0.65 (1.65) + 0.38 (0.97)					ØT_
ω						Di Ø Ø R Ø	A A 1
	F						
						SOURIAU shall not be due to a use of the the Specifications issue (professional r	e Products wh ed by either of recommendat
N						PN:	Countr FR 8D009X
					A 04-10-20	016 First Release	
_					ISS DATE Designed By:	Latest modification - by Date:	/
					TITLE	C	Composite
_					SCALE NA		eneral linear Tolerances: ±
					SOURIA	U WWW.SO	URIAU.C
				_	FORMAT A3		DURIAU D009X9
·	Н	G	F	E	D	C	

