Ŧ	۵	п –	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	-65°C to +200°C
	-Salt Spray	: 48 hours
	-Mass	: 14.95 g ± 10%

8D 0

G

11

F

01

S

F

В

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : B

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

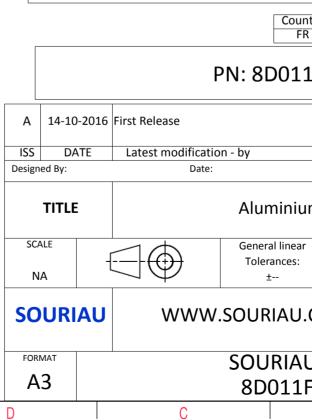

σ		A			
				4	
				T	
AS EXAMPLE				3	
any non-conformi which does not co of the Parties or l ndation, technical n untry Jurisc	mply with by a third part				
1F01SB	Not Listed			2	
			MOD N°		
um Receptac	customer drawing m Receptacle 8D series				
ar		PROJECT 59		1	
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° F01SB-C			SHEET		
B		Α		J	

		۵	гт —	m		0
		Contact Layout				Panel Cutor
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0)
	Ctc	1#12 11-01 X Y]		* 	ØT_
ω	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
N						Countr FR
	-				A 14-10-20 ISS DATE Designed By:	PN: 8D011 16 First Release Latest modification - by Date:
					TITLE SCALE NA	Aluminiun General linear Tolerances:
→					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011F
	Н	G	F	E	D	C

