

Ŧ	۵	н п	m	0



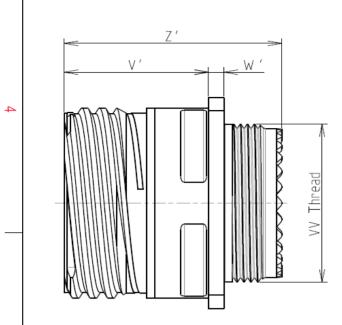

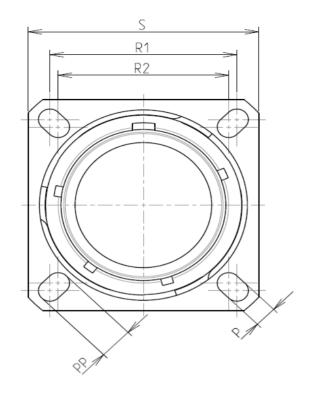

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			

: 2000 hours

8D 0

G

11

J

01

н

F

В


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : B

CONTACT TYPE : PIN (1500 Matings)

Е

CONTACT LAYOUT : 11-01



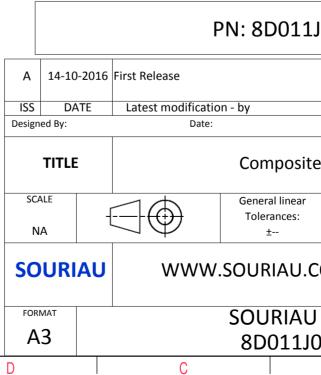

	σ		А		
					4
					3
S EX4	AMPLE				
whic er of t	non-conformit h does not co he Parties or t n, technical n	mply with by a third part	у		
Intry R	Jurisd	liction & Cont Not Listed	rol List		2
1JC	J01HB				
		CUSTOME		MOD N°	
ite	customer drawing e Receptacle 8D series				
ar	NPRDS / PROJECT				
			59		1
.cc	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	J DRG N° SHEET				
J01	LHB-C			1/2	J
	В		А		

		۵	н П	m	D	0
		Contact Layout				Panel Cutout
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		₩ ~	
ω	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendation)
N						Country FR
					A 14-10-20 ISS DATE Designed By:	PN: 8D011J
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.CO
					FORMAT A3	SOURIAU 8D011J0
l	Н	G	F	E	D	C

