
т	۵	<b>п</b>	m	0





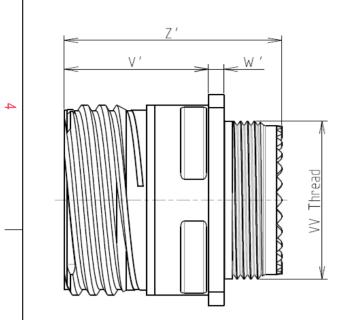

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 11.8 g ± 10%

8D 0

G

11

J

02

В

F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : C

CONTACT LAYOUT : 11-02

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

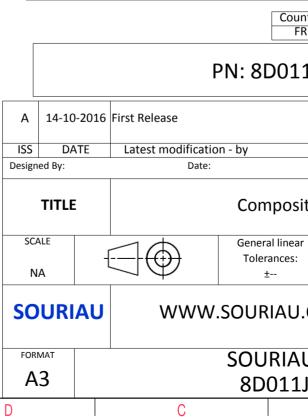

	ω		A			
		5			4	
IS EX4	AMPLE				3	
s whic er of t	ny non-conformity or damage which does not comply with of the Parties or by a third party ation, technical notice.)					
untry FR	Jurisdiction & Control List Not Listed					
.1J(	J02BC					
				MOD N°		
		CUSTOMER	RDRAWING			
site	e Receptacle 8D series					
ar			PROJECT <b>59</b>		1	
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	J DRG N° SHEET					
LJU	2BC-C B		A	1/2	J	

ſ	т	G		П	m		0	
		Contact Layout						Panel Cutou
4	.× .0 (2.	+Y IB IA IA +Y +X -Y .095 (2.4imm)				Σ	SQUARE FLANGE RECEPTACLE REAR MOUNTING	
	Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00)	Contact location All				F	Dim
ω								ØA ØAA R1 ØT
	-						due to a us the Specification	Il not be liable for an se of the Products wh ns issued by either of sional recommendat
CA.								PN: 8D011.
							D-2016 First Release ATE Latest modificat Date	
<u> </u>						SCALE NA		General linear Tolerances:
						FORMAT	AU WWW	v.souriau.c
					_ <del>_</del> <del>T</del>	A3		8D011J0
	Н	G		F	E \	D	C	

