т	۵	п	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

SHELL SIZE : 11

Н

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite	
	-Shell Plating	: Olive drab Cadmium	
	-Insulator	: Thermoplastic	
	-Contacts	: Copper Alloy	
	-Seals & Grommet	: Silicon Elastomer	
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
	-Durability	: 500 Mating cycles	
-Delivered without Souriau contacts			
	-Temperature Range	-65°C to +175°C	
	-Salt Spray	: 2000 hours	

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 11-02


CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : A



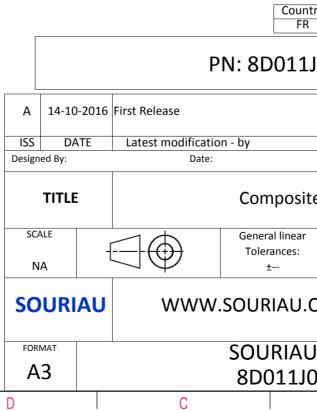

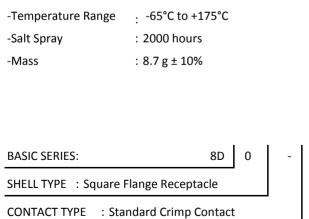

PLATING : J = Olive drab Cadmium

11

G

J

02

Ρ

F

A L

	σ		А			
					4	
LS EXA	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party dation, technical notice.)						
Intry R	/ Jurisdiction & Control List Not Listed					
1J0	LJO2PAL					
_						
		CUSTOMF	R DRAWING	MOD N°		
ite	e Receptacle 8D series					
ar	NPRDS / PROJECT					
			59	erty of	1	
I.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
			SHEET			
J02	PAL-C		Δ	1/2	J	
	В		A			

г	т	G		п	т	D		0	
		Contact Layout							Panel Cutou
4	.× .0 (2.	+Y IB IA +X 95 4(mm) (2.4(mm))					SQU.	ARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
	Shell Arrangement 11 -2	tion X-axis Y-axis (mm) (mm) (mm) 4 +.095 (2.41) +.000 (.00) 4 095 (2.41) +.000 (.00) 1 095 (2.41) +.000 (.00)	ntact ation All						
co								Ø F	ðΑ ØΑ R1 ØT
	-							SOURIAU shall not b due to a use of th the Specifications issue (professional	e Products wh ed by either of
N								PN:	Countr FR 8D011J
						ISS Designed	DATE By:	First Release Latest modification - b Date:	
-						SCALE NA			General linear Tolerances: ±
						SOL	IRIAU	WWW.SO	OURIAU.C
	Н	G		F	E	A3			3D011J0
						V			

