
| т | ۵ | н т | m | 0 |
|---|---|------------|---|---|
| | | | | |







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Composite | | | |
|--------------------------------------------------|----------------------------------------|--|--|--|
| -Shell Plating | : Olive drab Cadmium | | | |
| -Insulator | : Thermoplastic | | | |
| -Contacts | : Copper Alloy | | | |
| -Seals & Grommet | : Silicon Elastomer | | | |
| -Contact Plating | : Gold over copper Alloy 0.8µm minimum | | | |
| -Durability | : 500 Mating cycles | | | |
| -Delivered with Souriau contacts and Accessories | | | | |
| -Temperature Range | - 65℃ to +175℃ | | | |

: 2000 hours

8D 0

G

11

J

05

Н

F

А

| Connector dimension | | | |
|---------------------|-------------|--|--|
| Dim | Nominal | | |
| Р | 3.25±0.2 | | |
| PP | 4.93±0.2 | | |
| R1 | 20.62 | | |
| R2 | 18.26 | | |
| S | 26.2±0.3 | | |
| V' | 19.5+1.4/-0 | | |
| W' | 2.1/3.65 | | |
| Ζ' | 32 Max | | |
| VV THREAD | M15x1-6g | | |


ORIENTATION : A

CONTACT LAYOUT : 11-05

CONTACT TYPE : PIN (1500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

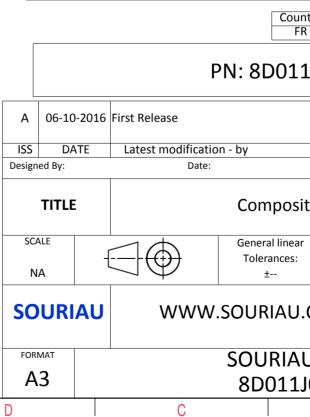

| | σ | | А | | | |
|-----------------|------------------------------------------------------------------------|------------------------------|----------|---------|---|--|
| | | | | | | |
| | | | | | 4 | |
| | | | | | 3 | |
| S EXA | AMPLE | | | | | |
| whic er of t | non-conformit h does not co he Parties or t n, technical n | mply with by a third part | у | | | |
| Intry R | Jurisd | liction & Cont Not Listed | rol List | | 2 | |
| 1JC | J05HA | | | | | |
| | | | | | | |
| | | CUSTOMF | | MOD N° | | |
| ite | customer drawing e Receptacle 8D series | | | | | |
| ar | NPRDS / PROJECT | | | | | |
| | | | 59 | orty of | 1 | |
| .cc | COM ti must not be reproduced or communicated without permission | | | | | |
| | J DRG N° SHEET | | | | | |
| .J05 | 5HA-C | | | 1/2 | J | |
| | В | | А | | | |
| | | | | | | |

| | т | ۵ | п | т | D | 0 |
|--------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| | | Contact Layout | | | | Panel Cutou |
| 4 | ×. | $ \overset{E}{\bigoplus} \overset{\bigoplus}{\underset{c}{\bigoplus}} \overset{A}{\underset{c}{\bigoplus}} , + \mathbf{x} $ | | | 7 | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| | Conta positio ID A B C C D E Shell Arrangement Numb | X-axis Y-axis (mm) +0.65 (1.65) +0.56 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42) er of Size Service Contact Supersedes | 1 | | 2 | |
| ى ى | size no. conta 11 -5 5 | | | | | Dim ØA ØAA R1 ØT |
| | | | | | | |
| | 9 | | | | | SOURIAU shall not be liable for and due to a use of the Products wh the Specifications issued by either of (professional recommendat |
| N | | | | | | Countr FR |
| | | | | | A 06-10- | PN: 8D011J |
| | | | | | ISS DA Designed By: | TE Latest modification - by Date: |
| | | | | | SCALE | Composite General linear |
| - | | | | | NA | Tolerances: |
| | | | | | SOURI | |
| | | 1 | | | FORMAT A3 | SOURIAU 8D011JC |
| | Н | G | F | E | D | C |

