
т	۵	н п	m	C C





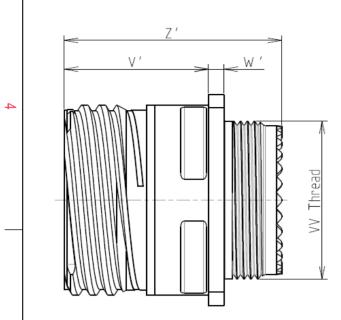

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		
-Salt Spray	: 2000 hours		

: 12.9 g ± 10%

8D 0

G

11

J

98

S

F

D


Connector dimension			
Nominal			
3.25±0.2			
4.93±0.2			
20.62			
18.26			
26.2±0.3			
19.5+1.4/-0			
2.1/3.65			
32 Max			
M15x1-6g			

CONTACT TYPE : SOCKET(500 Matings)

Е

CONTACT LAYOUT : 11-98

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

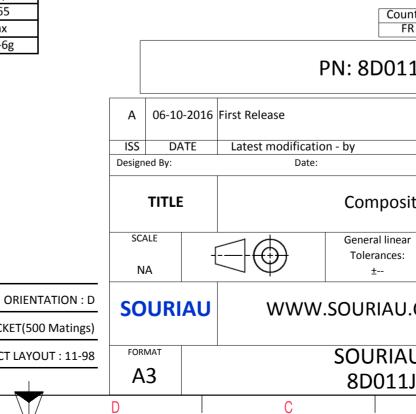

σ		Þ			
				4	
AS EXAMPLE				3	
any non-conforming which does not co of the Parties or I adation, technical n	mply with by a third party	,			
untry Jurisc FR	liction & Contro Not Listed	ol List		2	
1J98SD					
			MOD N°		
	CUSTOMER	DRAWING		-	
site Receptac	e Receptacle 8D series				
ar	NPRDS / F 85 9			1	
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°	1		SHEET		
LJ98SD-C		A	1/2	J	
2	1				

r		۵	н П	m	D	0	
		Contact Layout					Panel Cutout
4	-×	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Cont positi ID A B C D E E F Shell Arrangement Numbu size no. conta	+.000 (0.00) +.130 (3.30) +.130 (3.30) +.000 (0.00) : +.05 (1.65) 065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) : 065 (1.65) : +.000 (0.00) +.000 (0.00) +.000 (0.00) : 065 (1.65) : 065 (1.65) : 133 (3.30) : .000 (0.00) : .000 (0.00)	1		2		- 2
ω	size no. conta 11 -98 6					Dir ØA ØA RJ ØT	A
	-					SOURIAU shall not be due to a use of the the Specifications issued	Products whi
N						(professional re	
					A 06-10-2 ISS DAT Designed By:	016 First Release	
_					TITLE SCALE NA		omposite eneral linear folerances: ±
						SC	DURIAU
l	Н	G	F	E	A3 D	C	3D011J9

