
<b>—</b>	G	нт. П	m	D	0





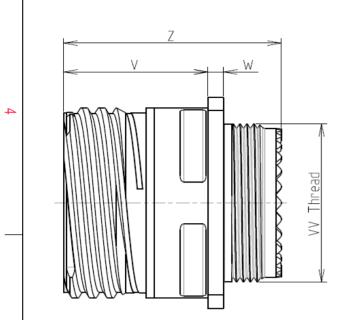

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel		
N	-Shell Plating	: Passivated		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered without Souriau contacts			
	-Temperature Range	: -65°C to +200°C		
	-Salt Spray	: 500 hours		

: 28.56 g ± 10%

8D 0

G

11

К

02

Ρ

F

A L

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			


Delivered W/O Contacts


CONTACT LAYOUT : 11-02

CONTACT TYPE : PIN(500 Matings)

Е

**ORIENTATION : A** 



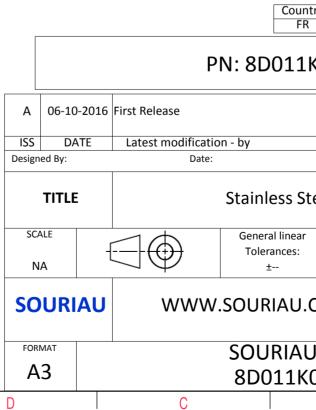

	Φ		A		
	Re				4
as exa	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third par	ty trol List		2
					-
		CUSTOME	R DRAWING	MOD N°	
Stee	Steel Receptacle 8D series				
ar			/ PROJECT <b>359</b>		4
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1
	DRG N° 2PAL-C			SHEET	
	B		A		]

ſ	т	G	TT .	m	D	0
		Contact Layout				Panel Cutou
4	 (2.	+Y 18 1A +X 95 4imm) (2.4imm)			Σ -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Com posil IC A B Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) + .095 (2.41) + .000 (.00) 095 (2.41) + .000 (.00)	t n		¥ (	Dim
ى ى						ØA ØAA R1 ØT
						SOURIAU shall not be liable for and due to a use of the Products wh the Specifications issued by either of (professional recommendat
C						PN: 8D011K
					A 06-10-201 ISS DATE Designed By:	L6 First Release Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT	
				- T	A3	SOURIAU 8D011K0
	Н	G	F	I E	D	C

