
 (L)	 	0	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 29.44 g ± 10%

8D 0

G

11

К

99

Ρ


F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

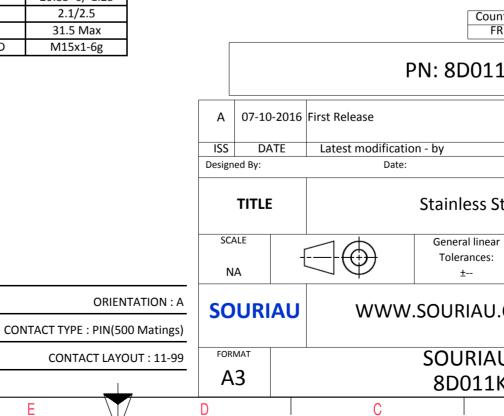

Φ		Þ			
				4	
AS EXAMPLE				3	
any non-confor					
ndation, technica	or by a third part I notice.) isdiction & Conti				
1K99PA	Not Listed			2	
			MOD N°		
	CUSTOMER	DRAWING			
Steel Recep	teel Receptacle 8D series				
ar	NPRDS /			1	
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N K99PA-C	0		SHEET		
B		A	-	J	

		۵	<u>п</u>	m		0
		Contact Layout				Panel Cuto
4	-×	$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & $			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Contr positi ID A B C D E F G Shell Arrangement Numb	(Insert arrangement 11-99) act on Location X-axis (mm) Y-axis (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 000 (0.00) +.000 (0.00)	٦		کر ۔ ب	
ىن	Shell Arrangement Numb size no. cont 11 -99 7	acts contacts rating location				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either c
N						(professional recommenda
					A 07-10-20	PN: 8D011
					ISS DATE Designed By:	
					SCALE	General linear Tolerances:
<u> </u>					SOURIA	U WWW.SOURIAU.
		1	1		FORMAT A3	SOURIAU 8D011K
	Н	G	l F	E	D	C

