

	Ŧ	۵	п	m		0
--	---	---	---	---	--	---



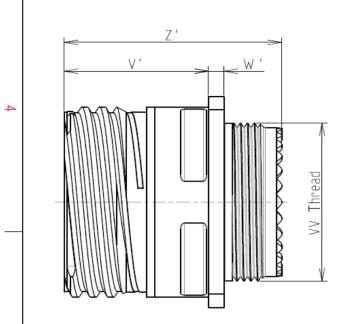



Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

-		
	-Shell Material	: Composite
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered without Sou	uriau contacts
	-Temperature Range	65°C to +200°C
	-Salt Spray	: 2000 hours
	-Mass	: 9.7 g ± 10%
		-

8D 0

G

11

М


01

Ρ

F

В ΙL

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g

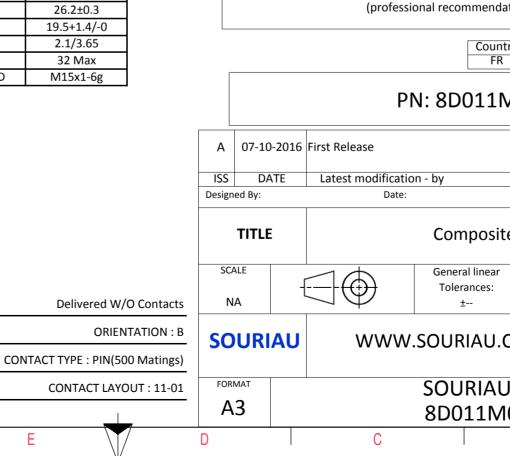

C					
LAY	OUT SHOWN AS EX	AMPLE			3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
PN: 8D011M01PBL					
First Release					
Latest modificatio Date:	лі - Dy		CUSTOMER DRAWIN	MOD N°	
	Composite	Receptac	le 8D series		
$\exists \bigoplus$	General linear Tolerances: ±	NPRDS / PROJECT 859			1
This document is the property of SOURIAU SOURIAU it must not be reproduced or communicated without permission					
SOURIAU DRG N° 8D011M01PBL-C				SHEET 1/2	
С		B		A	J

r		۵	н П	m	D	0	
		Contact Layout				Panel	Cutout
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	cutou
	Ctc	1#12 11-01 X Y]		۳. ۲		2
ω	A	0 0				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liable due to a use of the Produ the Specifications issued by ei (professional recomm	icts whi ther of
N							Country FR
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					SCALE NA	Comp General li Tolerand ±	near ces:
					FORMAT A3	SOUR 8D01	IAU
	Н	G	l F	E	D	C	

