
| - | | | _ | |
|----------|----|---------|---|---|
| _ | دی | 111 | 0 | 0 |





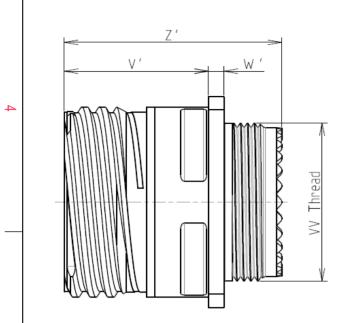

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

| : Nickel | | | | |
|--|--|--|--|--|
| : Thermoplastic | | | | |
| : Copper Alloy | | | | |
| : Silicon Elastomer | | | | |
| Alloy 0.8µm minimum | | | | |
| 5 | | | | |
| -Delivered with Souriau contacts and Accessories | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

8D 0

G

11

Μ

99

В


F

В

| Dim | Nominal |
|-----------|-------------|
| Р | 3.25±0.2 |
| PP | 4.93±0.2 |
| R1 | 20.62 |
| R2 | 18.26 |
| S | 26.2±0.3 |
| V' | 19.5+1.4/-0 |
| W' | 2.1/3.65 |
| Z' | 32 Max |
| /V THREAD | M15x1-6g |

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

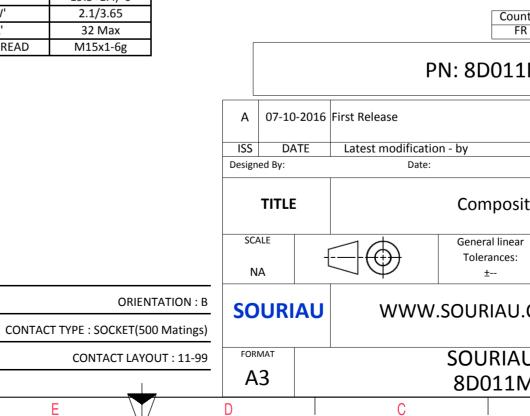

| | Ξ | | А | | |
|-------------------|---|-----------------------------|-----------|--------|---|
| | | | | | |
| | | | | | |
| A | | 8 | | | 4 |
| | | | | | |
| | | | | | |
| AS EXA | AMPLE | | | | 3 |
| | | | | | |
| | | | | | |
| s whic er of t | non-conformit ch does not co che Parties or t | mply with by a third par | | | |
| ndatio | on, technical n | otice.) | | | |
| untry FR | Jurisd | liction & Con Not Listed | trol List | | 2 |
| 1M | и99BB | | | | |
| | | | | | |
| | | CUSTOME | R DRAWING | MOD N° | |
| site | e Receptacle 8D series | | | | |
| ar | | NPRDS / | PROJECT | | |
| : | | | 59 | | 1 |
| J.CC | COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | |
| | DRG N° | | | SHEET | |
| | 9BB-C | | | 1/2 | |
| | В | | А | | - |
| | | | | | |

| | | ۵ | <u>п</u> | m | D | 0 | |
|---|--|---|----------|---|-----------------------------------|--|----------------------------|
| | | Contact Layout | | | | Pa | anel Cutout |
| 4 | ×- | $ \begin{array}{c} $ | | | 1 | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING | |
| | Conta positi ID A B C C D E E F G Shell Arrangement Numb size no. | (Insert arrangement 11-99) Location V-axis (mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) +.000 (0.00) +.000 (0.00) 065 (1.65) +.113 (2.87) +.000 (0.00) +.000 (0.00) | ٦ | | 2 2 2 | | δ <u>τ</u> _ |
| ω | size no. conta 11 -99 7 | acts contacts rating location | | | | Dim ØA ØAA R1 ØT | |
| | | | | | | SOURIAU shall not be lia | |
| | | | | | | due to a use of the Pro the Specifications issued b (professional reco | y either of ommendati |
| 2 | | | | | | PN: 80 | Country FR 0011N |
| | | | | | | 116 First Release | |
| | | | | | ISS DATE Designed By: TITLE | Date: | nposite |
| - | | | | | SCALE NA | Gener Tole | ral linear rances: ± |
| | | | | | SOURIA | | |
| | | | | | FORMAT A3 | 8D0 | JRIAU |
| | Н | G | F | E | D | C | |

