

т	۵	п	m	0



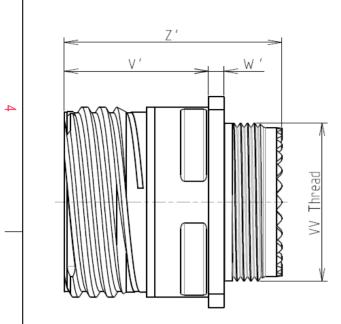



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
2	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	· -65°C to +200°C			
	remperature nunge				
	-Salt Spray	: 2000 hours			
	-Mass	: 9.6 g ± 10%			

8D 0

G

11

Μ

99

Ρ

F

Ν

P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26
R1 20.62 R2 18.26
R2 18.26
C 2C2/02
S 26.2±0.3
V' 19.5+1.4/-
W' 2.1/3.65
Z' 32 Max
V THREAD M15x1-6g


ORIENTATION : N


D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-99



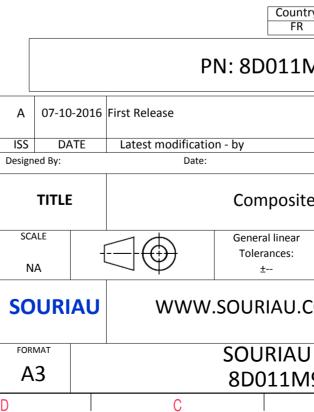

	ω	Þ			
	Re			4	
SS EXA	AMPLE			3	
s which er of t indation untry FR	on, technical n	mply with by a third party		2	
T 1 A 1					
		CUSTOMER DRAWING	MOD N°		
ite	ite Receptacle 8D series				
ar :		NPRDS / PROJECT 859		1	
J.CC	COM This document is the property of SOURIAU it must not be reproduced or				
	communicated without permission UDRG N° SHEET				
	9PN-C		1/2		
	B	A	<u> </u>	J	

		۵	<u>п</u>	m		0
		Contact Layout				Panel Cutou
4	-×	$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & $			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Contr positi ID A B C C D C D F F G Shell Arrangement Numb size no.	(Insert arrangement 11-99) Location X-axis (mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 006 (1.65) +.113 (2.87) +.000 (0.00) +.000 (0.00) 065 (1.65) Service Contact	7			ØT ØA
ω	11 -99 7					Dim ØA ØAA R1 ØT
	—				[SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D011N
					A 07-10-20 ISS DATE	016 First Release
					Designed By:	Date: Composite
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D011M
	Н	G	F	E	D	C

