
Ŧ	G	нт – – – – – – – – – – – – – – – – – – –	m	D	0





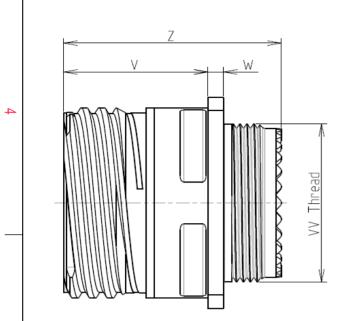

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

\triangleleft		: Stainless Steel	Р		
			PP		
	-Shell Plating	: Nickel	R1		
	-Insulator	: Thermoplastic	R2		
	-Contacts	: Copper Alloy	S V		
	-Seals & Grommet	: Silicon Elastomer	W		
\sim	-Contact Plating	: Gold over copper Alloy 0.8µm minimum	Z		
	-Durability	: 500 Mating cycles	VV THRE		
	-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 500 hours			
	-Mass	: 30.16 g ± 10%			

8D 0

G

11

S

02

S

F

A L

P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V 20.83+0/-1.25
R1 20.62 R2 18.26 S 26.2±0.3 V 20.83+0/-1.25
R2 18.26 S 26.2±0.3 V 20.83+0/-1.25
S 26.2±0.3 V 20.83+0/-1.25
V 20.83+0/-1.25
W 2.1/2.5
Z 31.5 Max
VV THREAD M15x1-6g

Delivered W/O Contacts


CONTACT LAYOUT : 11-02

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : A

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

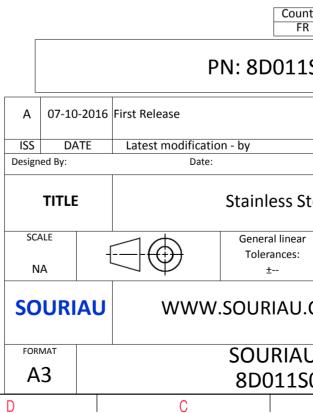

	ω		A			
					4	
AS EX4	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third part			2	
				MOD N°	-	
		CUSTOMER	R DRAWING			
Stee	Steel Receptacle 8D series					
ar :			PROJECT		1	
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
S02	2SAL-C			1/2	J	
	В		А			

r	т	۵		т	m	D	0	
		Contact Layout						Panel Cutou
4	.x .0 (2.	+Y IB IA +Y +X +X 95 (2.41mm)					SQUARE FLANGE RECEPTACL REAR MOUNTING	E (TYPE 0)
	Shell Arrangement 11 -2	X-axis Y-axis (mm) (mm) - +.095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)	Contact ccation All				L C	Dim
ω								ØA ØAA R1 ØT
	+						due to a us the Specificatio	ll not be liable for an se of the Products wh ns issued by either of ssional recommendat
N								PN: 8D011S
						ISS [Designed By:		2:
_						SCALE NA	Ĕ ↓ ↓ ↓ ↓	General linear Tolerances:
						FORMAT		V.SOURIAU.C
	Н	G		F	E	D A3	C	8D011S0

