
T	G	т	m	D	0





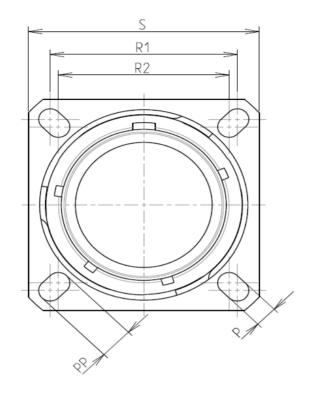

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65℃ to +175℃		
-Salt Spray	: 500 hours		

: 11.5 g ± 10%

8D 0

G

11

W

22

А

F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-22

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend



Φ					
			4		
S EXAMPLE			3		
any non-conformit which does not co or of the Parties or b dation, technical no intry Jurisd R 1W22AN	mply with by a third party		2		
		MOD N°			
	CUSTOMER DRAWING				
um Receptacl	m Receptacle 8D series				
ar	NPRDS / PROJECT 859				
I.COM	This document is the property of				
U DRG N°		SHEET 1/2			
W22AN-C B	A	1/2			

		Contact Layout				Panel Cut SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(^o o o [*] c ^o o _s 4#22D			ب ۱	
	Ctc A B	11-22 X Y 1.905 1.905 1.905 -1.905] - - -		4	
ယ	C D	-1.905 -1.905 -1.905 1.905]			Dim ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend
N						PN: 8D011
					A 08-10- ISS DA [*] Designed By:	2016 First Release E Latest modification - by Date:
_					SCALE NA	Aluminiu General linear Tolerances: ±
					FORMAT A3	SOURIA
	Н	G	F	E	D	8D011V
					W	

Т

ш

т

G

0

