Ŧ	۵	н <b>п</b>	m	0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Without Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +175°C -Temperature Range

: 2000 hours

: 10.4 g ± 10%

8D 0

G

11

Х

01

А


F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

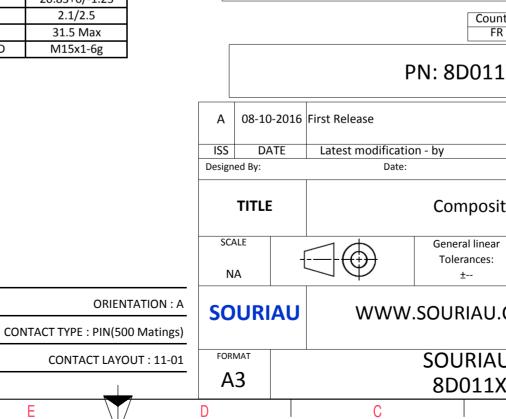

	Φ		А			
					4	
AS EX4	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)						
untry FR	Jurisd	liction & Cont Not Listed	trol List		2	
1X01AA						
	1			MOD N°		
	CUSTOMER DRAWING					
	te Receptacle 8D series					
ar :	NPRDS / PROJECT <b>859</b>			4		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1	
	DRG N°			SHEET		
X0	1AA-C	I		1/2	J	
	В		А			

		۵	<u>п</u>	m		0	
		Contact Layout				Pane	el Cutout
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc	1#12 11-01 X Y	]		<u></u> ₩	ØT	-
ယ	A	0 0				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liable due to a use of the Produ the Specifications issued by e	lucts whi
2						(professional recomr	Country FR
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
-					SCALE NA	Comp General Toleran ±	linear nces:
			_	- 1	FORMAT A3	SOUR 8D02	RIAU
	Н	G	l F	E	D	C	

