т	<u>م</u>	п	т	<b>O</b>







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Without Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +175°C -Temperature Range

: 2000 hours

: 10.4 g ± 10%

8D 0

G

11

Х

01

Ρ

F

D

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-01

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

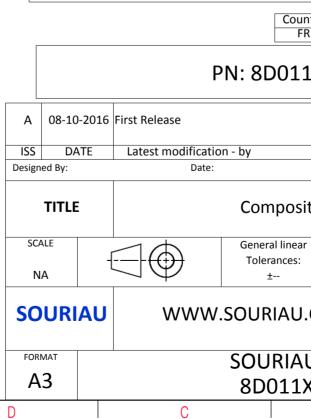

	Φ		A		
					4
AS EXA	AMPLE				3
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)					
untry FR	Jurisd	liction & Con Not Listed		]	2
1X	01PD				
				MOD N°	-
		CUSTOME	R DRAWING		
ite	te Receptacle 8D series				
ar :	NPRDS / PROJECT 859				
	This document is the property of				1
J.CC	.COM SOURIAU it must not be reproduced or communicated without permission				
U I	DRG N°			SHEET	1
.X0	1PD-C			1/2	
	В		А		

		۵	<u>п</u>	m		0	
		Contact Layout				Panel Cuto	out
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc	1#12 11-01 X Y	-		<u></u> ₩	ØT_	ď
ယ	A	0 0				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either	whi of
2						(professional recommend Coun FR PN: 8D011	ntry ?
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
<u> </u>					SCALE NA	General linear Tolerances:	
			1		FORMAT A3	SOURIAU 8D011>	U
	Н	G	l F	E	D	C	

