
	I	Q	н <b>т</b>	m	0





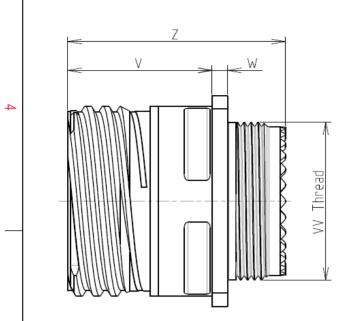

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite					
-Shell Plating	: Without Plating					
-Insulator	: Thermoplastic					
-Contacts	: Copper Alloy					
-Seals & Grommet	: Silicon Elastomer					
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum					
-Durability	: 500 Mating cycles					
-Delivered with Souriau contacts and Accessories						
-Temperature Range	: -65°C to +175°C					

: 2000 hours

: 13.3 g ± 10%

8D 0

G

11

Х

01

S

F

С


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : C

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е



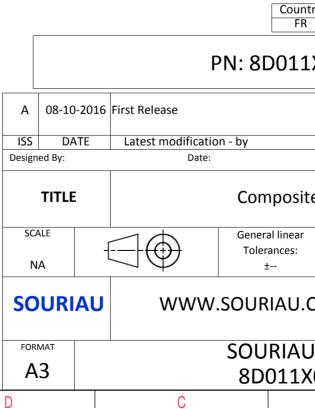

	Ξ		Þ	>	_		
					4		
AS EXA	AMPLE				3		
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)							
untry FR	/ Jurisdiction & Control List Not Listed						
.1X01SC							
		CUSTO	MER DRAWING	MOD N°			
ite Receptacle 8D series							
ar :	NPRDS / PROJECT 859						
This document is the property of SOURIAU it must not be reproduced or communicated without permission							
UDRG N° SHEET							
.X0	1SC-C			1/2			
	В		A	N			

		۵	г т	m		0
		Contact Layout				Panel Cutout
		01				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(	01			~ -	
		1#12			<u>.</u>	
	Ctc A	11-01 X Y 0 0				Dim
ω						ØA ØAA R1
						ØΤ
						SOURIAU shall not be liable for any
						due to a use of the Products whi the Specifications issued by either of (professional recommendati
N					[	Country FR
						PN: 8D011X
						16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Composite
<b>_</b>					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011X0
l	Н	G	F	E	D	C

