
I m	





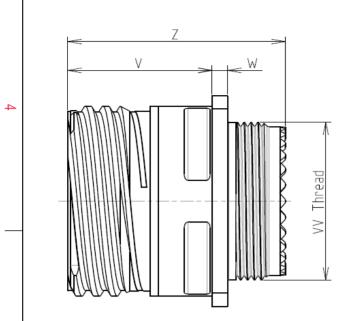

LAYOUT SHOWN AS

Keying Shown as example

ΙL

С

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 2000 hours			

: 11.7 g ± 10%

8D 0

G

11

Х


01


S

F

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Е



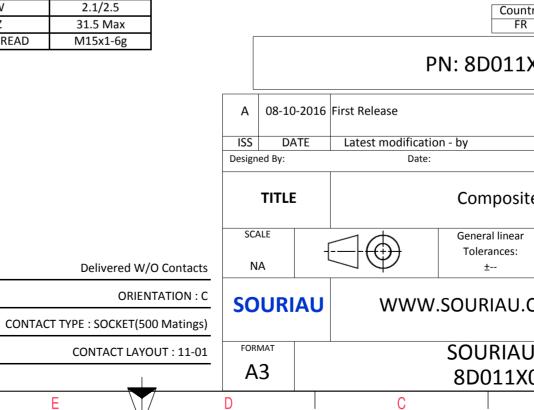

	σ			A			
	Ra					4	
S EXA	MPLE					3	
whic er of t idatio	non-conformit h does not co he Parties or t n, technical n	mply wi by a thire otice.)	th d party				
Intry R	Jurisd	iction & Not Li	Control sted	List]	2	
1X()1SCL						
					MOD N°		
	CUSTOMER DRAWING						
	e Receptacle 8D series						
ar	NPRDS / PROJECT 859						
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1	
	U DRG N° SHEET (01SCL-C 1/2						
×01	B			A	1/2		

r	τ	۵	<u>п</u>	m		0
		Contact Layout				Panel Cuto
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]			ØT
ى ن	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wi the Specifications issued by either o (professional recommenda
N						Count FR
_					A 08-10-20 ISS DATE Designed By:	PN: 8D011) 16 First Release Latest modification - by Date:
					TITLE SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011X0
l	Н	G	F	E	D	C

