	<b>–</b>		<b>п</b>		
	<u> </u>	<u> </u>		 <u> </u>	







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Composite				
	-Shell Plating	: Without Plating				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
	-Durability	: 500 Mating cycles				
	-Delivered without Souriau contacts					
	-Temperature Range	-65°C to +175°C				
	-Salt Spray	: 2000 hours				

: 11.5 g ± 10%

8D 0

G

11

Х

05

S


F

Ν L

Connector dimension					
Nominal					
3.25±0.2					
4.93±0.2					
20.62					
18.26					
26.2±0.3					
20.83+0/-1.25					
2.1/2.5					
31.5 Max					
M15x1-6g					

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

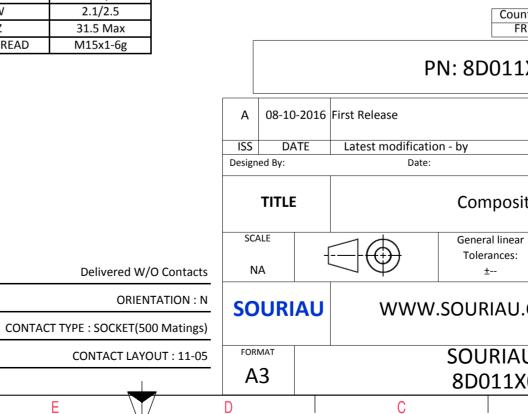

	σ			A				
						4		
S EXA	AMPLE					3		
any non-conformity or damage which does not comply with r of the Parties or by a third party dation, technical notice.)								
Intry R	y Jurisdiction & Control List Not Listed							
1X05SNL								
					MOD	۱°		
	CUSTOMER DRAWING							
site	e Receptacle 8D series							
ar	NPRDS / PROJECT <b>859</b>							
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1		
					SHEET 1/2			
X05SNL-C1/2BA								

		۵	п	m	D	0
		Contact Layout				Panel Cutou
4	- <u>×</u>	$ \begin{array}{c} & & & \\ & $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positio ID A B C C D E Shell Arrangement Numb	X-axis  Y-axis (mm)    +065 (1.65)  +056 (1.42)    +.113 (2.87) 065 (1.65)    +.000 (0.00) 130 (3.30)   113 (2.87) 065 (1.65)   065 (1.65)  +.056 (1.42)	1		¥ 22	
ى س	size no. conta 11 -5 5					Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for an
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D011X
					A 08-10- ISS DAT Designed By:	2016 First Release TE Latest modification - by Date:
					SCALE	
<b>_</b>					NA	Tolerances:
		1	1		FORMAT A3	SOURIAU 8D011X0
	Н	G	F F	E \	D	С

