

т	ם ا	н п	 D	0



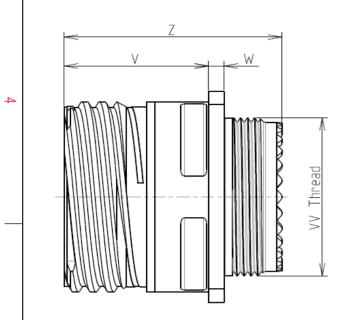

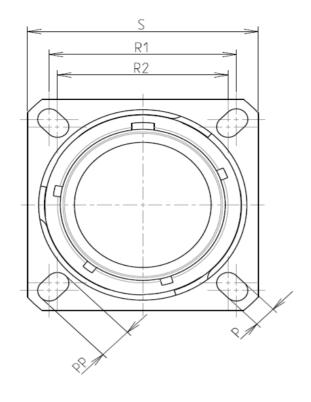

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

: 14.89 g ± 10%

8D 0

G

11

Ζ

04

В


F

D

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

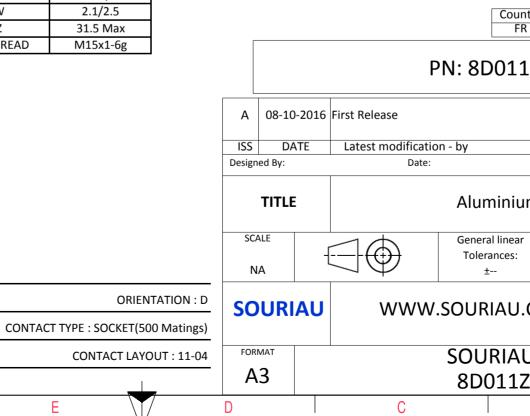

σ							
		I					
	0			4			
6/	Free						
-	1						
	1						
1							
-							
S EXAMPLE				3			
any non-confo	ormity or dar	nage					
which does no of the Parties							
er of the Parties or by a third party adation, technical notice.)							
R	Not Listed						
1Z04BD							
			MOD N°				
	CUST	OMER DRAWING					
um Recept	Im Receptacle 8D series						
ar :	NPRDS / PROJECT 859						
	This document is the property of						
I.COM SOURIAU it must not be reproduced or							
		communicated without permission SHEET					
.Z04BD-0			1/2				
B	-	A		J			

_	Ŧ	۵	п –	m	D	O	
		Contact Layout				Panel Cut	ou
4	-×_	$ \begin{array}{c} $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt size no. cont 11 -4 4	X-axis (mm) Y-axis (mm) +.065 (1.65) .065 (1.65) +.065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65) 065 (1.65) .065 (1.65)			8	ØT	
ယ						Dim ØA ØAA R1 ØT	
	-					SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend	wh [.] of
N						Cour Ff	ntr R
					ISS DATE		
					Designed By: TITLE SCALE	Date: Aluminiu General linear	
-					NA SOURIA	Tolerances:	
		-			FORMAT A3	SOURIA 8D0112	
	Н	l G	F	E \	D	C	

