


—	Ω ا	т – – – – – – – – – – – – – – – – – – –	m	<u>О</u>

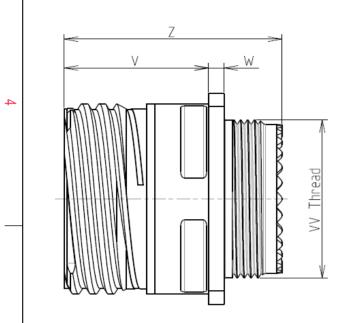

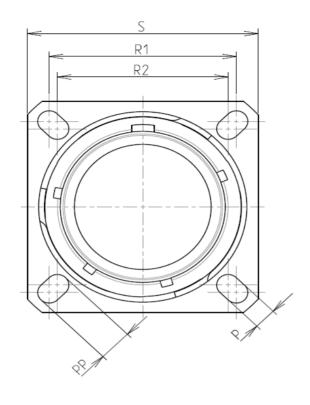



LAYOUT SHOWN AS

Keying Shown as example


CHARACTERISTICS


ယ


-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
N	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 48 hours			

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g



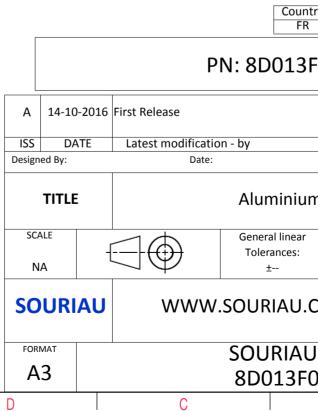

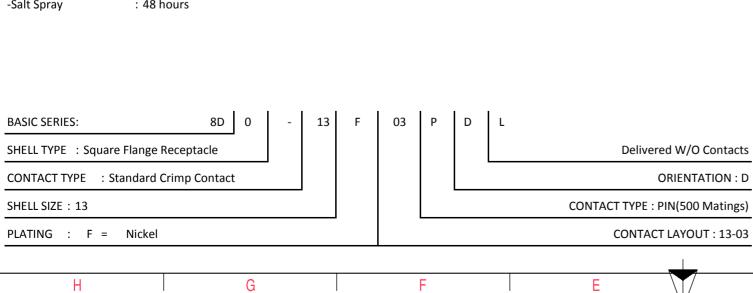

σ		Þ	_	
			4	
AS EXAMPLE			3	
r any non-conformi s which does not co er of the Parties or l ndation, technical n untry Jurisc FR 3FO3PDL	mply with by a third party	List	2	
			-	
	CUSTOMER DI	MOD N° RAWING		
um Receptacle 8D series				
ar :	NPRDS / PR 859	OJECT	1	
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°		SHEET 1/2		
F03PDL-C B		Α	J	

r	工	۵	н г	m	D	0	
4		Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	Panel Cuto
		3#16			R 1		
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47			Ϋ́.		Dim
ω						Ø	ØAA R1 ØT
						SOURIAU shall not b due to a use of th the Specifications issu (professional	ne Products w led by either c recommenda
0						PN:	Count FR 8D013F
					A 14-10-2 ISS DAT Designed By:	2016 First Release E Latest modification - b Date:	Эү
<u> </u>					SCALE NA		Aluminiur General linear Tolerances: ±
					SOURIA		
					FORMAT A3	8	OURIAL 3D013F(
	Н	G	F	E	D	C	

