

т	۵	п	m	0



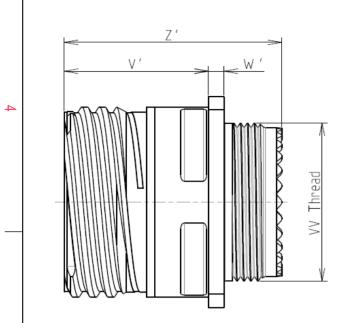



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65℃ to +175℃			

: 2000 hours

8D 0

G

13

J

03

В

F

А


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M18x1-6g


ORIENTATION : A

CONTACT LAYOUT : 13-03

CONTACT TYPE : SOCKET(500 Matings)

Е



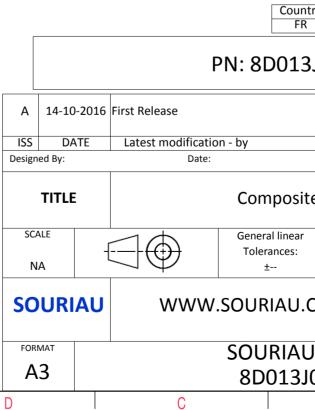

	ω		A		
					4
					3
	AMPLE				
whic er of t idatio	non-conformit h does not co he Parties or b n, technical n	mply with by a third part otice.)			
Intry R	Jurisd	liction & Cont Not Listed	rol List		2
.3J(3J03BA				
				MOD N°	
			R DRAWING		-
	Receptacl				
ar			PROJECT 59		1
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	J DRG N° SHEET				
810:	BBA-C		A	1/2	J

03 03 3+16 16 1 10 1		工	G	н г	m		0	
A 3416			Contact Layout					Panel Cuto
Ctc X Y A 2.39 1.47 B 0 -2.73 C -2.39 1.47 SOUBRAU shall not be fiable for due to a use of the Products the Specifications issued by either (professional recommendation) N Image: Composition of the Products the Specification issued by either (professional recommendation) N Image: Composition of the Products the Specification issued by either (professional recommendation) N Image: Composition of the Products the Specification issued by either (professional recommendation) SOURIAU NWW.SOURIAU, NWW.SOURIAU, Total Image: Composition of the Products the Specification issued by either (professional recommendation)	4						R1	E (TYPE O)
C3 SURRAU shall not be liable for the Products the Specification shared (rotessional recommend (rotessional recommend PN: 8D013 A 14-10-2015 First Release ISS DATE Latest modification - by Designed By TITLE Composi SCALE NA General Integration SOURIAU SOURIAU TOTALES SOURIAU TOTALES SOURIAU SOURIAU SOURIAU		AB	X Y 2.39 1.47 0 -2.79				E	Dim
No No No No No No No No No No	ى ت							ØAA R1
No No No No No No No No No No		-				[
A 14-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Composi SCALE Image: SCALE NA Image: Scale SOURIAU WWW.SOURIAU. FORMAT SOURIAU A3 SOURIAU							due to a us the Specificatio	se of the Products w
A 14-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Composi SCALE General linear Tolerances: x SOURIAU WWW.SOURIAU. FORMAT SOURIAU A3 SDURIAU	N							Count FR
ISS DATE Latest modification - by Designed By: Date: TITLE Composi SCALE NA General linear Tolerances: ± SOURIAU FORMAT A3 SOURIAU								PN: 8D013
Designed By: Date: TITLE Composi SCALE Image: SCALE NA Image: Scale NA Image: Scale SOURIAU WWW.SOURIAU. FORMAT SOURIAU A3 SOURIAU						A 14	-10-2016 First Release	
SCALE NA SOURIAU FORMAT A3 SOURIAU SOURIAU A3 SOURIAU SOURIAU A3 SOURIAU A3 SOURIAU								
NA Tolerances: ± SOURIAU WWW.SOURIAU. FORMAT SOURIAU A3 8D013.						ווד	LE	Composit
FORMAT SOURIAU A3 8D013	_							
A3 8D013.						SOU	RIAU WWV	V.SOURIAU.
								SOURIAU 8D0131
H I G I F I E \bigvee D I C I	l	Н	G	F	E	D	C	

