

|--|



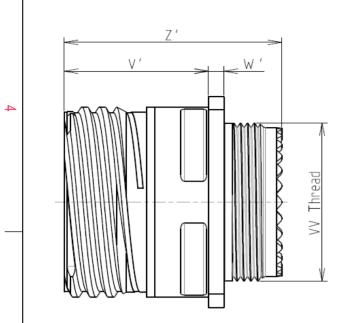



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	- 65℃ to +175℃			
-Salt Spray	: 2000 hours			

8D 0

G

13

J

03

Ρ

F

E L

Dim	Nominal
Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
/V THREAD	M18x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 13-03

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : E



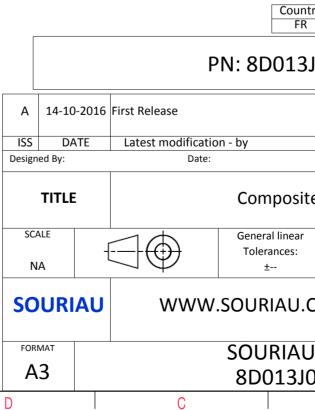

	Φ		A		
					4
					3
	AMPLE				
whic er of t	non-conformit h does not co he Parties or t n, technical n	mply with by a third part	ty		
intry R	Jurisd	liction & Cont Not Listed	trol List		2
310	3PEL				
	1			MOD N°	
			R DRAWING		
	te Receptacle 8D series				
ar			' PROJECT 59		1
I.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°	1		SHEET	
103	BPEL-C		A	1/2	J

		۵	н г	m	D	0	
		Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING R1	Panel Cuto
4		3#16			2		
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47					im
ى ن						Ø	бА АА 31 бТ
	-					SOURIAU shall not b due to a use of th the Specifications issu (professional	e Products w ed by either c
2						PN:	Count FR 8D013
					A 14-10 ISS DA Designed By:	2016 First Release TE Latest modification - b Date:	У
-					SCALE NA		ieneral linear Tolerances: ±
					FORMAT		URIAU.(DURIAU
	Н	G	F	E	A3	۲۰۰۶ ۲۰۰۶ ۲۰۰۶	3D013J0

