


т	۵	н <b>п</b>	m	0

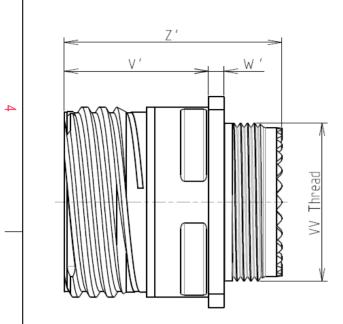

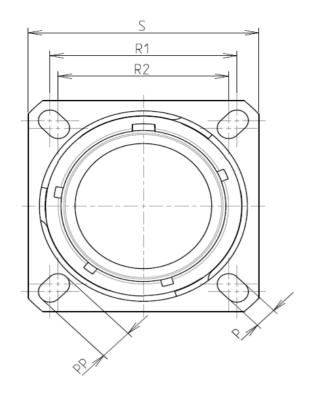



Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65℃ to +175℃				

: 2000 hours

8D 0

G

13

J

26


С

J

F

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
VV THREAD	M18x1-6g		

Е

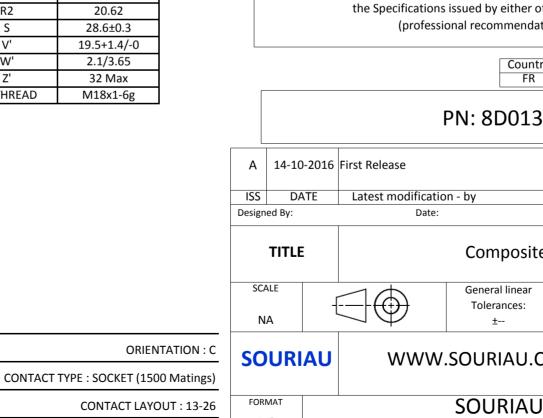

A3

D

0		Φ		A		
						4
LAY	OUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country     Jurisdiction & Control List FR     Not Listed       PN: 8D013J26JC						2
rst Release					MOD N°	
Latest modificatio Date:	11 - DY		CUSTO	MER DRAWING		
Composite Receptacle 8D series						
$] \bigoplus$	General linear Tolerances: ±			DS / PROJECT <b>859</b>		1
WWW.SOURIAU.COM   This document is the property of SOURIAU     it must not be reproduced or communicated without permission						
SOURIAU DRG N°     SHEET       8D013J26JC-C     1/2						
С	001212	B		A	7 -	J

_	Ŧ	۵	п п	m	D	0
		Contact Layout				Panel Cutou
4					- Ξ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		2#12 6#22D			¥	
ω	Ctc A B C D E F 1 2	X Y   0 3.47   2.47 4.34   2.47 -4.34   0 -3.47   -2.47 -4.34   -2.47 -4.34   3.25 0   -3.25 0				Dim ØA ØAA R1 ØT
	-				[	SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013
_					A 14-10-20 ISS DATE	16 First Release Latest modification - by
					Designed By:	Date: Composite
_ <b>_</b>					SCALE	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D013J2
	Н	G	F	E	D	С

