

т	۵	н <b>п</b>	m	0



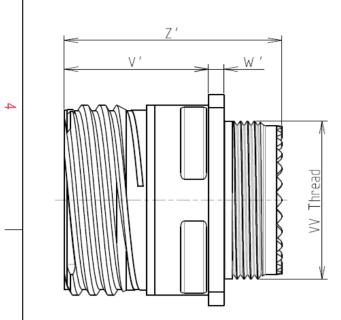



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 14.4 g ± 10%

8D 0

G

13

J

26

Ρ


F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M18x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

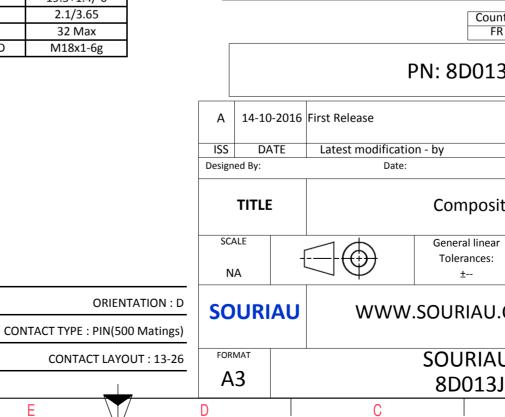

	Φ		A		
					4
S EXA	AMPLE				3
· any r	non-conformit				
er of t	which does not comply with of the Parties or by a third party lation, technical notice.)				
Intry R	Jurisd	liction & Cont Not Listed	rol List		2
.3J2	3J26PD				
		CUSTOME		MOD N°	
ite	e Receptacle 8D series				
ar			PROJECT		
			59	perty of	1
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET 1/2	
JZt	5PD-C B		A	1/2	J

_	т	G	н <b>г</b>	m	D	0
		Contact Layout				Panel Cutou
4	(	26			۲ – ۲	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_	<b></b>	6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26         X       Y         0       3.47         2.47       4.34         2.47       -4.34         0       -3.47         -2.47       -4.34         -2.47       -4.34         3.25       0         -3.25       0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013J
					ISS DATE	16 First Release Latest modification - by
					Designed By:	Date: Composite
					SCALE NA	General linear Tolerances: ±
					SOURIAU	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013J2
L	Н	G	F	E	D	С

