
 G	т	m	D	0





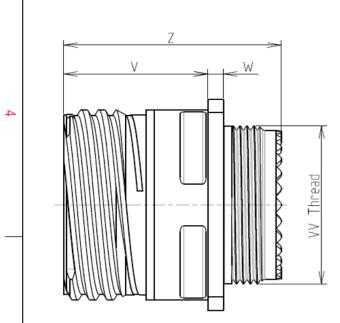

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 41.72 g ± 10%

8D 0

G

13

Κ

04

В


F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

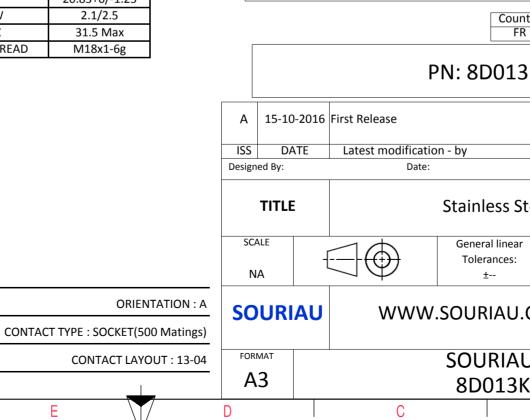

τ	π		Þ				
ſ					4		
S EXAMPL	E				3		
which do	es not co arties or t chnical n Jurisc	by a third part			2		
		CUSTOME	R DRAWING	MOD N°			
Steel Receptacle 8D series							
ar			NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
U DR				SHEET			
	н-с В		A	_,_	J		

ſ	т	G	н т	m		0	
		Contact Layout					Panel Cutout
4	;	$x \begin{pmatrix} & & & \\ & & $			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Shell Arrangement N 13 -4	n ID (mm) (mm) +.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)			∞ -	ØA	<u>ع</u>
ω						Dim ØA ØAA R1 ØT	A
	+					SOURIAU shall not be I due to a use of the I the Specifications issued (professional ree	Products whi by either of
N						PN: 8	Country FR 3D013K
					A 15-10-20 ISS DATE Designed By:	16 First Release	
					TITLE	Ger	nless Ste
<u> </u>					SOURIA	U www.sou	JRIAU.C
					FORMAT A3		URIAU D013K0
L	Н	G	F	E	D	С	

