

	I	۵	н п	m		0
--	---	---	------------	---	--	---



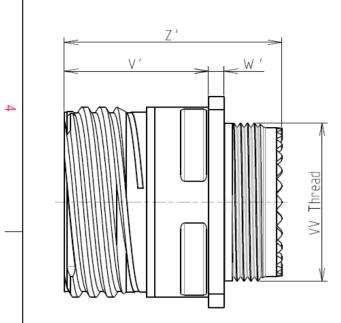



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite				
	-Shell Plating	: Nickel				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
	-Durability	: 500 Mating cycles				
	-Delivered with Souria	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	-65°C to +200°C				
	-Salt Spray	: 2000 hours				
	-Mass	: 14.1 g ± 10%				

8D 0

G

13

Μ

08

Ρ

F


В

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M18x1-6g

CONTACT TYPE : PIN(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

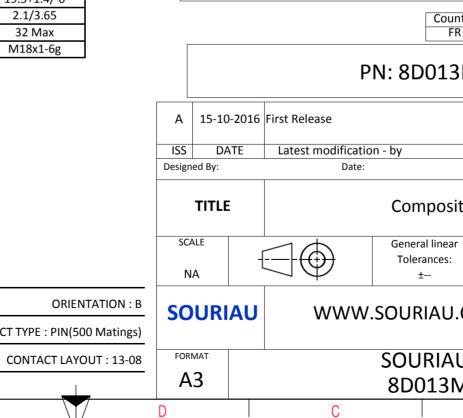

Φ		A			
R				4	
S EXAMPLE				3	
any non-conformi	ty or damage]		
which does not co of the Parties or l adation, technical n	mply with by a third party				
3M08PB	Not Listed			2	
			MOD N°		
	CUSTOMER	DRAWING			
ite Receptac	e Receptacle 8D series				
ar	NPRDS / PROJECT 859				
I.COM	This document is the property of				
U DRG N° M08PB-C			SHEET 1/2		
В		A		1	

	T	۵	н Г	m	D	0	
		Contact Layout				Panel C	utout
4		$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & $			A	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Con posi II A E C C C C E F C C C F	Uion D X-axis (mm) Y-axis (mm) A +.065 (1.65) +.157 (3.99) B +.170 (4.32) +.000 (0.00) C +.120 (3.05) 120 (3.05) D .000 (0.00) 170 (4.32) E 120 (3.05) 120 (3.05) F 170 (4.32) +.000 (0.00) S 065 (1.65) +.157 (3.99)			۲ <u>۲</u> –		2
သ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liable fo due to a use of the Product the Specifications issued by eith (professional recommen	s whi er of
23						PN: 8D01	FR
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					TITLE SCALE NA	Compose General line Tolerances ±	ear
					SOURIA		
					FORMAT A3	SOURIA 8D013	
	Н	G	F	E	D	C	

