

Ŧ	۵ D	п –	m	0



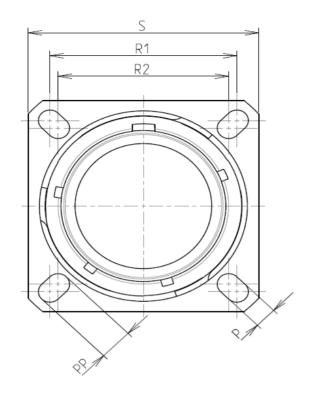



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +200°C			

: 2000 hours

8D 0

G

13

Μ

26

Н

F

А


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M18x1-6g			


ORIENTATION : A

CONTACT LAYOUT : 13-26

CONTACT TYPE : PIN (1500 Matings)

Е



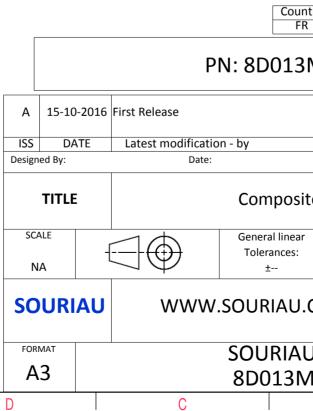

Β		A			
				4	
AS EXAMPLE				3	
any non-conformity or damage which does not comply with er of the Parties or by a third party dation, technical notice.)					
	CUSTOMER	RDRAWING	MOD N°		
ite Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° M26HA-C			SHEET		
B		A	,	J	

_	т	G	н г	m	D	0
		Contact Layout				Panel Cutou
4	(26 P 2 P 2 P 2 P 2 P 2 P 2 P 2 P 2			- 22	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 -4.34 3.25 0 -3.25 0				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
					A 15-10-202	PN: 8D013N
_					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Composite
					SCALE NA	General linear Tolerances: ±
					SOURIAU	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013M
L	Н	G	F	E	D	С

