

T	Ω (	п	m	<u>о</u>



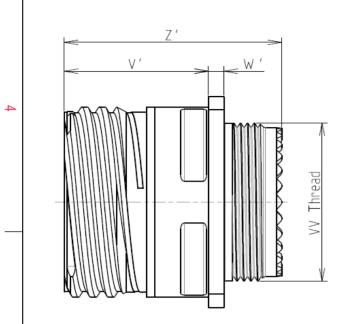



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy  $0.8 \mu m$  minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 2000 hours -Salt Spray -Mass : 20.1 g ± 10%

8D 0

G

13

Μ

26

S

F


В

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	23.01	
R2	20.62	
S	28.6±0.3	
V'	19.5+1.4/-0	
W'	2.1/3.65	
Ζ'	32 Max	
VV THREAD	M18x1-6g	

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

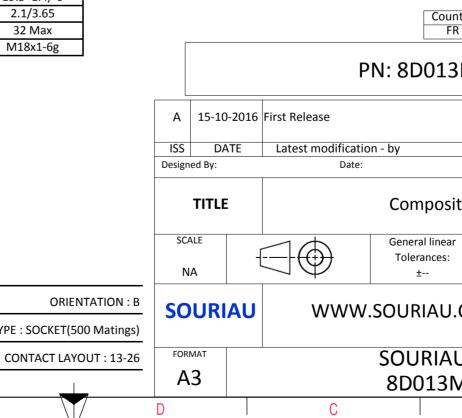

	Φ		Þ			
					4	
AS EXA	AMPLE				3	
s which er of t indation untry R	non-conformit ch does not co he Parties or t on, technical n Jurisd	mply with by a third part			2	
	1			MOD N°		
customer DRAWING						
ar		8	PROJECT 59		1	
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 26SB-C			SHEET 1/2		
	B		А		J	

r	т	۵	г	m		0
		Contact Layout				Panel Cuto
4		26			2 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	[	2#12 6#22D	l		¥	
ω	Ctc A B C D E F 1 2	13-26       X     Y       0     3.47       2.47     4.34       2.47     -4.34       0     -3.47       -2.47     -4.34       -2.47     4.34       3.25     0       -3.25     0				Dim ØA ØA R1 ØT
	-					SOURIAU shall not be liable for a due to a use of the Products w
						the Specifications issued by either (professional recommendation)
N						PN: 8D013
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Composit
-					SCALE NA	General linear Tolerances: ±
					SOURIA	
		1			FORMAT A3	SOURIAL 8D013N
	Н	l G	l F	E	D	C

