

	 G	нт. П	m	D	0



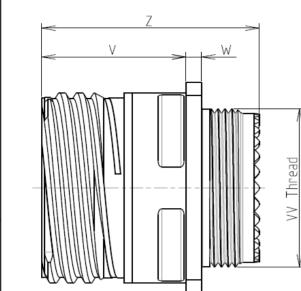

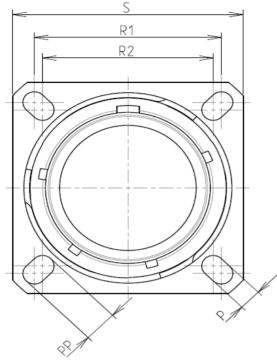

CHARACTERISTI

4

_

ω

 \sim

_

ם ד	ш п	D	0	σ	A	
				EXAMPLE		4
CHARACTERISTICS	Keying Shown as example Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V 20.83±0/-1.25		SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda	vhich does not comply with of the Parties or by a third party	/	
-Seals & Grommet: Silicon Elastomer-Contact Plating: Gold over copper Alloy 0.8μm minimum-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories	W 2.1/2.5 Z 31.5 Max VV THREAD M18x1-6g		PN: 8D013	Not Listed	ol List	2
-Temperature Range _: -65°C to +200°C -Salt Spray : 500 hours		ISS DATE	.6 First Release Latest modification - by Date:	CUSTOMED	MOD N°	-
		Designed By:		сизтомея customer customer		_
BASIC SERIES: 8D 0 - 13 S SHELL TYPE : Square Flange Receptacle - 13 S		SCALE NA	General linear Tolerances: ±	NPRDS / F 85 This docu	9 Iment is the property of	1
CONTACT TYPE : Standard Crimp Contact ORIENTATION : E HELL SIZE : 13 CONTACT TYPE : SOCKET(500 Matings) PLATING : S = Nickel CONTACT LAYOUT : 13-03 FORMAT SOURIAU SOURIAU SOURIAU			_			
H G	F E	D A3		SO3BE-C B	1/2 A	

$\begin{array}{c} \text{Cuttures} \\ 03 \\ \hline \\ 0 \\ \hline \hline \\ 0 \\ \hline \hline \hline \\ 0 \\ \hline \hline \\ 0 \\ \hline \hline \hline \\ 0 \\ \hline \hline \hline \\ 0 \\ \hline \hline \hline \hline$		工	G	н г	m		(o
A B B B B B C C C C C C C C C C C C C			Contact Layout					Panel Cuto
Image: Cross of the second	4						R1	EPTACLE (TYPE 0)
ΔAA ΔA ΔT SOURIAU shall not be liable for a due to a use of the Products the Specification subset of the Product subse		AB	X Y 2.39 1.47 0 -2.79					Dim
No SOURIAU WWW.SOURIAU.	ى نى							ØAA R1
A 15-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Stainless St SOURIAU WWW.SOURIAU.(TOTWAT SOURIAU.(TOTWAT SOURIAU.(TOTMAT SOUR		-				[
PN: 8D013		-					due to the Specifi	o a use of the Products w ications issued by either
A 15-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Stainless St SCALE NA General linear Tolerances: ± SOURIAU WWW.SOURIAU. FORMAT SOURIAU. A3 SOURIAU	N							Coun FR
ISS DATE Latest modification - by Designed By: Date: TITLE Stainless St SCALE NA General linear Tolerances: ± SOURIAU FORMAT SOURIAU. A3 SOURIAU								PN: 8D013
Designed By: Date: TITLE Stainless St SCALE General linear NA Tolerances: ± SOURIAU FORMAT SOURIAU A3 SOURIAU						A	15-10-2016 First Release	
SCALE NA SOURIAU SOURIAU SOURIAU FORMAT A3 SOURIAU A3 SOURIAU SOURIAU A3 SOURIAU								
NA Tolerances: ± SOURIAU WWW.SOURIAU. A3 SOURIAU A3 SOURIAU						т	ITLE	Stainless St
FORMAT SOURIAL A3 8D0135	<u> </u>							Tolerances:
A3 8D0135						SOL	JRIAU W	WW.SOURIAU.
W		H	G	F	E	1		

