

T	G	П	m	<b>O</b>



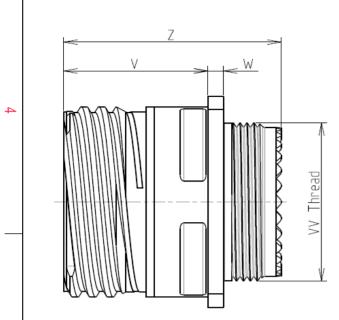

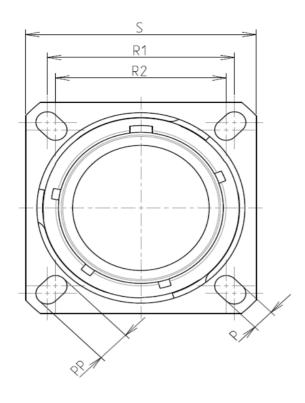

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

ယ

 $\sim$ 


-Standard : Based on MIL-DTL-38999 Series III

-Temperature Range : -65°C to +200°C

-Shell Material : Stainless Steel -Shell Plating : Nickel : Thermoplastic -Insulator : Copper Alloy -Contacts : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories

: 500 hours

Connector dimension Nominal Dim 3.25±0.2 Р 4.93±0.2 PP R1 23.01 20.62 R2 S 28.6±0.3 20.83+0/-1.25 V W 2.1/2.5 Ζ 31.5 Max VV THREAD M18x1-6g

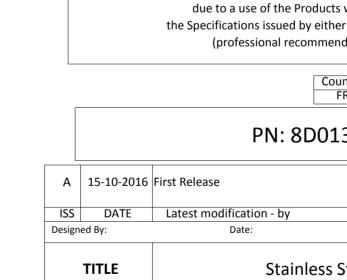

<u> </u>	BASIC SERIES: 8D 0 SHELL TYPE : Square Flange Receptacle	-	13	S	03	Р	A			SCALE	-		General li Tolerano ±	
	CONTACT TYPE : Standard Crimp Contact								ORIENTATION : A	SOUR		\\\\\\\\	SOURIA	
	SHELL SIZE : 13							CONTACT TY	PE : PIN(500 Matings)				.500117	10.
	PLATING : S = Nickel							CON	TACT LAYOUT : 13-03				SOUR	IAI
										A3			8D01	135
	H G					F		Е		D		С		

O										
						4				
LAY	YOUT SHOWN AS EXA	AMPLE				3				
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed										
PN: 8D013S03PA										
Tatest modificatio	n - by				MOD N°	_				
Date:			CUSTOMER D	RAWING						
Stainless Steel Receptacle 8D series										
General linear NPRDS / PROJECT Tolerances: 859						4				
WWW.SOURIAU.COM This document is the property of SOURIAU   it must not be reproduced or communicated without permission										
SOURIAU DRG N°     SHEET       8D013S03PA-C     1/2										
С		B		A		J				

_	т	۵	н <b>г</b>	m		0	
		Contact Layout					Panel Cuto
4		03 () () () () () () () () () ()			7	SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	
	Ctc A B C	13-03       X     Y       2.39     1.47       0     -2.79       -2.39     1.47			v		Jan Dim
ω						Q Q	ØA ØAA R1 ØT
	_						
						SOURIAU shall not b due to a use of th the Specifications issu (professional	he Products w Jed by either (
N							Count FR
						PN	: 8D013
					A 15-10-	2016 First Release	
_					ISS DA Designed By:	TE Latest modification - b Date:	by
					TITLE	St	ainless St
<b>→</b>					SCALE NA		General linear Tolerances: ±
					SOURI	AU WWW.SC	DURIAU.
					FORMAT A3	S	OURIAU 8D013S
	Н	G	F	E	D	С	

