

Ŧ	Ω	нт – – – – – – – – – – – – – – – – – – –	m	O



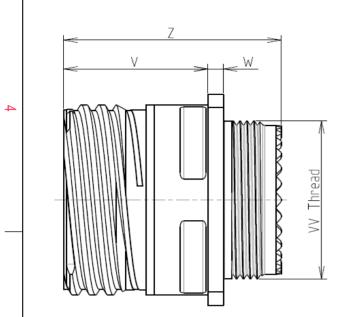

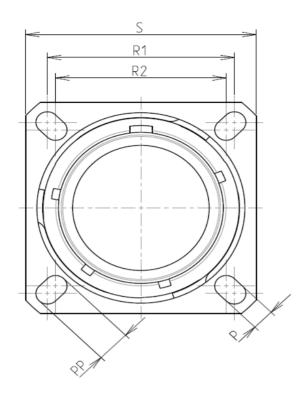

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Temperature Range : -65°C to +200°C

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories

: 500 hours

8D 0

G

13

S

03

Ρ


F

С

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 23.01 R1 20.62 R2 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M18x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

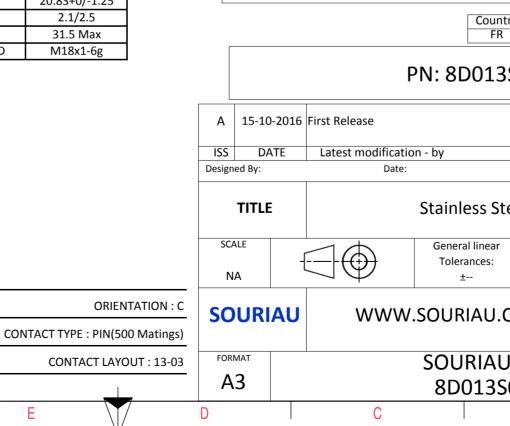

	Φ		Þ		
					4
S EXA	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third par	ty		2
					-
		CUSTOME	R DRAWING	MOD N°	
Steel Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 3PC-C			SHEET	
50	B		A		J
	_	•			

r	Ŧ	G	н г	m	D	0	
		Contact Layout					Panel Cuto
4		03 ())) 3#16				SQUARE FLANGE RECEPT REAR MOUNT	ACLE (TYPE 0)
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47					Dim
ω							ØA ØAA R1 ØT
	\vdash						
	-					due to a the Specifica	hall not be liable for a a use of the Products w tions issued by either o fessional recommenda
N							Count FR
							PN: 8D013
					A 1	5-10-2016 First Release	
					ISS Designed	DATE Latest modif	ication - by Date:
					т	TLE	Stainless St
<u> </u>					SCALE NA		General linear Tolerances: ±
					SOU	RIAU WW	/W.SOURIAU.
					FORMAT A3		SOURIAU 8D013S
	Н	G	F	E	D	С	

