Ŧ	۵	н п	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			

: 2000 hours

: 14.1 g ± 10%

8D 0

G

13

Х

08

А

F

Ν


Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-08



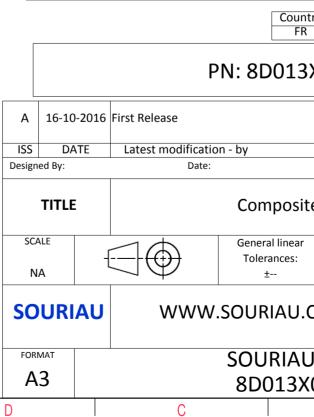

	Φ		A				
AS EXA	AMPLE				3		
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)							
untry FR	Jurisd	liction & Con Not Listed]	2		
3X08AN							
				MOD N°	-		
		CUSTOME	R DRAWING				
site	ite Receptacle 8D series						
ar :	NPRDS / PROJECT 859						
This document is the property of							
J.CC	M		SOURIAU st not be reproduc nicated without pe				
U I	DRG N°	I		SHEET			
X0	8AN-C			1/2	J		
	В		A				

	T	۵	ات	m		0
		Contact Layout				Panel Cuto
4	-×	$ \begin{pmatrix} & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & &$			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Com posi II A B CC D D E F G G H	Uion D X-axis (mm) Y-axis (mm) A +.065 (1.65) +.157 (3.99) B +.170 (4.32) +.000 (0.00) C +.120 (3.05) 120 (3.05) D .000 (0.00) 170 (4.32) E 120 (3.05) 120 (3.05) F 170 (4.32) +.000 (0.00) S 065 (1.65) +.157 (3.99)			£α ₩	ØT
သ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
23						Count FR PN: 8D013
					A 16-10-20 ISS DATE Designed By:	16 First Release
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	
		-			FORMAT A3	SOURIAL 8D013X
	Н	G	F	E	D	C

