
Ŧ	۵	н п	m	0





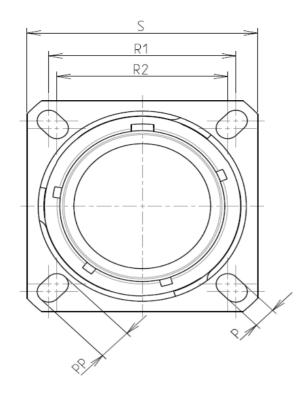

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Without Plating			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts					
	-Temperature Range	: -65°C to +175°C			
	-Salt Spray	: 2000 hours			

: 12.7 g ± 10%

8D 0

G

13

Х

26


Ρ


F

L А

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

Е



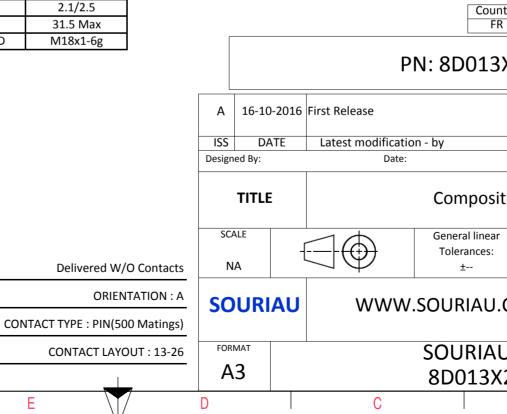

	ω		А				
					4		
AS EX4	AMPLE				3		
s which er of t indation untry FR	non-conformit th does not co the Parties or to on, technical n Jurisc	mply wit by a thirc otice.)	h I party Control List		2		
MOD N°							
site	customer drawing ite Receptacle 8D series						
ar	NPRDS / PROJECT 859						
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	DRG N° 5PAL-C	I		SHEET			
B A							

_	т	۵	п п	m	D	0
		Contact Layout				Panel Cutor
4	(26			- 2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		6#22D			y	
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an
						due to a use of the Products when the Specifications issued by either o (professional recommendation)
N						Countr FR
					A 16-10-20	PN: 8D013X
_					ISS DATE	Latest modification - by
					Designed By:	Date: Composite
					SCALE NA	General linear Tolerances:
					SOURIAU	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013X2
L	Н	G	F	E	D	С

