
Ξ	۵	п –	m	0





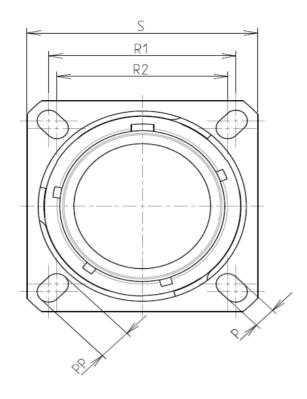

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Without Plating				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered without Souriau contacts					
-Temperature Range	-65°C to +175°C				
-Salt Spray	: 2000 hours				

: 12.7 g ± 10%

8D 0

G

13

Х

26

Ρ

F


D

L

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

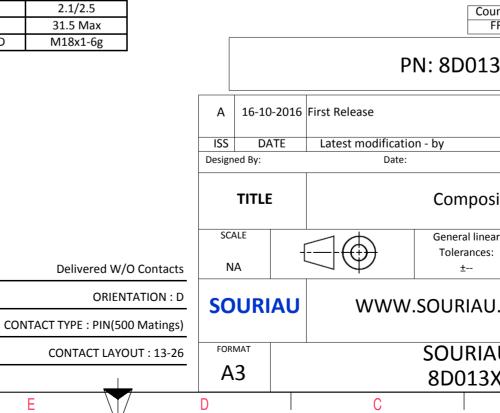

	Φ		А	•		
						4
AS EXA	AMPLE					3
s which er of t indation untry FR	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply wit by a thirc otice.)	th 9 party Control List			2
	1				MOD N°	
site	customer drawing te Receptacle 8D series					
ar		NPI	RDS / PROJECT			
		Т	859	ronerty	of	1
This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N°				SHEET		
X26PDL-C 1/2					J	
	В		Ą			

_	T	G	н <b>г</b>	m	D	0
		Contact Layout				Panel Cutou
4	(	26 <sup>9</sup> 9 9 <sup>2</sup> <sup>3</sup> <sup>1</sup> <sup>2</sup> <sup>8</sup> 8 2#12			2 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_	<b></b>	6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26   X Y   0 3.47   2.47 4.34   2.47 -4.34   0 -3.47   -2.47 -4.34   -2.47 -4.34   3.25 0   -3.25 0				Dim ØA ØAA R1 ØT
	F					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
					A 16-10-201	PN: 8D013X
_					ISS DATE	Latest modification - by
					Designed By:	Date: Composite
_					SCALE NA	General linear Tolerances:
					SOURIAL	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013X2
L	Н	G	F	E	D	С

