
| | I | Q | н т | m | 0 |
|--|---|---|------------|---|---|
| | | | | | |





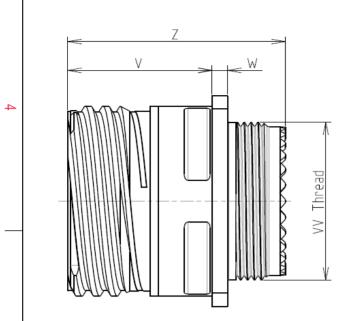

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Composite | |
|-------------------|---|--|
| -Shell Plating | : Without Plating | |
| -Insulator | : Thermoplastic | |
| -Contacts | : Copper Alloy | |
| -Seals & Gromme | t : Silicon Elastomer | |
| -Contact Plating | : Gold over copper Alloy 0.8µm minimum | |
| -Durability | : 500 Mating cycles | |
| -Delivered with S | Delivered with Souriau contacts and Accessories | |
| -Temperature Ra | nge65°C to +175°C | |

: 2000 hours

: 20.1 g ± 10%

8D 0

G

13

Х

26

S

F

А

| Connector dimension | | | | |
|---------------------|---------------|--|--|--|
| Dim | Nominal | | | |
| Р | 3.25±0.2 | | | |
| PP | 4.93±0.2 | | | |
| R1 | 23.01 | | | |
| R2 | 20.62 | | | |
| S | 28.6±0.3 | | | |
| V | 20.83+0/-1.25 | | | |
| W | 2.1/2.5 | | | |
| Z | 31.5 Max | | | |
| VV THREAD | M18x1-6g | | | |


ORIENTATION : A

CONTACT LAYOUT : 13-26

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

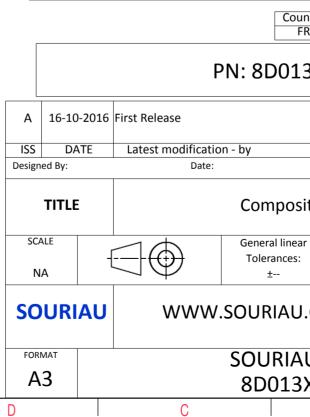

| σ | | > | | | |
|---|---|----------|---|--|--|
| | | | | | |
| | | | 4 | | |
| S EXAMPLE | | | 3 | | |
| | | | | | |
| any non-conformity or damage which does not comply with or of the Parties or by a third party dation, technical notice.) | | | | | |
| Intry Jurisc R | diction & Control List Not Listed | | 2 | | |
| 3X26SA | | | | | |
| | | MOD N° | | | |
| | CUSTOMER DRAWING | | - | | |
| te Receptacle 8D series | | | | | |
| ar | NPRDS / PROJECT 859 | | | | |
| I.COM | This document is the p SOURIAU it must not be repro communicated without | duced or | 1 | | |
| U DRG N° | | SHEET | | | |
| X26SA-C | | 1/2 | J | | |
| 5 | . , | | | | |

| _ | Т | G | н г | m | D | 0 |
|---|---|--|------------|---|--------------|--|
| | | Contact Layout | | | | Panel Cut |
| 4 | (| 26 | | | 22 - | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| _ | | 6#22D | | | ¥ | |
| ω | Ctc A B C D E F 1 2 | 13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 -4.34 3.25 0 -3.25 0 | | | | Dim ØA ØA R1 ØT |
| | + | | | | | SOURIAU shall not be liable for a |
| | | | | | | due to a use of the Products w the Specifications issued by either (professional recommend |
| N | | | | | | Coun FR |
| | | | | | A 16 10 200 | PN: 8D013 |
| _ | | | | | ISS DATE | Latest modification - by |
| | | | | | Designed By: | Date: Composi |
| _ | | | | | SCALE NA | General linear Tolerances: ± |
| | | | | | SOURIAL | J WWW.SOURIAU. |
| | | | | _ | FORMAT A3 | SOURIAU 8D013> |
| L | Н | G | F | E | D | C |

