

	T	G	нт. П	m	0



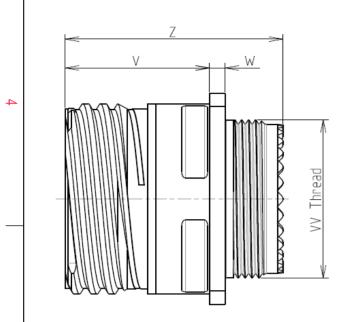

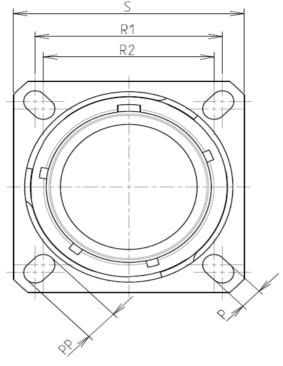

Keying

## CHARACTERISTICS

ω

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE: 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 500 hours			

: 14.72 g ± 10%

8D 0

G

13

-

Ζ

26

Р

F

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

m		O	σ	► ►	
S R1 R2 C C C C C C C C C C C C C C C C C C					4
$\downarrow$		LAYOUT SHOW	VN AS EXAMPLE		3
Connector dimension       Dim     Nominal       P     3.25±0.2       PP     4.93±0.2       R1     23.01       R2     20.62       S     28.6±0.3       V     20.83±0/-1.25       W     2.1/2.5       Z     31.5 Max       VV THREAD     M18x1-6g		due to a use of the Prod the Specifications issued by e	e for any non-conformity or da lucts which does not comply w either of the Parties or by a thi mendation, technical notice.) Country Jurisdiction & FR Not L	ith rd party	2
		PN: 8D0	)13Z26PDL		
	A 17-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUST	MOD N°	
	TITLE	Alum	inium Receptacle 8D	series	
D L Delivered W/	O Contacts NA	General Toleran ±	nces:	PRDS / PROJECT 859	1
	TATION : D SOURIAU	······································			
CONTACT TYPE : PIN(50 CONTACT LAYO					
E	D	С	В	A	1

-	Ŧ	۵	н п	т	D	0
		Contact Layout				Panel Cutou
4	(	26			2 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	<b></b>	6#22D			V	
ω	Ctc A B C D E F 1 2	13-26   X Y   0 3.47   2.47 4.34   2.47 -4.34   0 -3.47   -2.47 -4.34   -2.47 4.34   3.25 0   -3.25 0				Dim ØA ØA R1 ØT
	F					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013Z
					A 17-10-20 ISS DATE	16 First Release Latest modification - by
					Designed By:	Date: Aluminium
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D013Z2
L	Н	G	F	E	D	C

