
т	۵	п	п	0





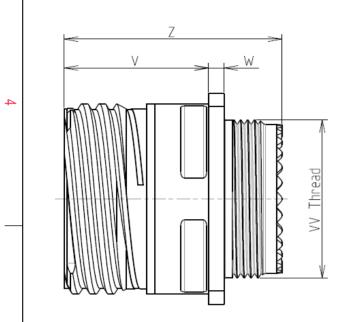

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered without Sour -Temperature Range			

: 17.41 g ± 10%

8D 0

G

13

Ζ

26

S

F

DL

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 13-26

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : D



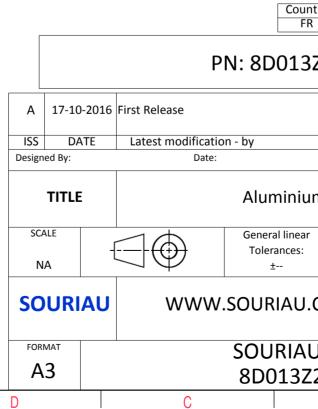

σ		A			
				4	
S EXAMPLE				3	
any non-conform which does not o of the Parties o adation, technical	comply with r by a third pa notice.)	arty			
untry Juri FR	sdiction & Co Not Liste			2	
3Z26SDL					
			MOD N°		
um Recepta	m Receptacle 8D series				
ar	NPRDS	S / PROJECT			
		859		1	
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
			SHEET		
Z26SDL-C B		A	1/2	J	
_					

_	Ŧ	G	п П	m	D	0
		Contact Layout				Panel Cutou
4	(	26			22 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_	<b></b>	6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26         X       Y         0       3.47         2.47       4.34         2.47       -4.34         0       -3.47         -2.47       -4.34         -2.47       4.34         3.25       0         -3.25       0				Dim ØA ØAA R1 ØT
	F					SOURIAU shall not be liable for an
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013Z
_					ISS DATE	16 First Release Latest modification - by
					Designed By:	Date: Aluminium
					SCALE NA	General linear Tolerances: ±
					SOURIAU	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013Z2
	Н	G	F	E	D	C

