
т	۵	н п	m	C C







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 17.2 g ± 10%

8D 0

G

15

J

35

А

F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M22x1-6g		


ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 15-35

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

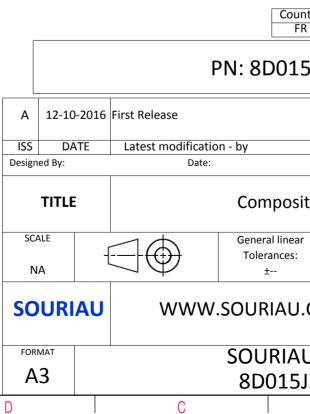

	Ξ		A		
		3			4
AS EX4	AMPLE				3
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)					
untry FR	Jurisdiction & Control List Not Listed				2
.5J35AA					
		CUSTORAS		MOD N°	
site	customer drawing e Receptacle 8D series				
ar :	NPRDS / PROJECT				
			59 sument is the prop	perty of	1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET	
012;	5AA-C B		A	1/2	J

_	Т	۵	н г	m	D	0	
		Contact Layout				F	Panel Cutou
4	×				ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Contact position ID Loc X-axis (mm) 1 +.045 (1.14) 2 +.123 (3.12) 3 +.211 (5.36) 4 +.254 (6.45) 5 200 (5.07) 6 +.247 (6.27) 7 +.200 (5.08) 8 +.130 (3.30) 9 +.045 (1.14) 10 045 (1.14)	262 (6.65) 29123 (3.12) +.119 (3.02			£Σ ₩	ØA	ØT_
ω	11 -130 (3.30) 12 -200 (5.08) 13 -247 (6.27) 14 -266 (6.76) 15 -254 (6.47) 16 -211 (5.36) 17 -123 (3.12) 18 -045 (1.14) 19 +.045 (1.14)	-232 (5.89) 30 045 (1.14) +.172 (4.37) -175 (4.45) 31 +.045 (1.14) +.074 (1.88) -098 (2.49) 32 +.090 (2.29) 004 (0.10) -010 (2.5) 33 +.045 (1.14) 082 (2.08)	9 9 9 9 9 9 9 9 9 9 9 9 9 9			Dim ØA ØAA R1 ØT	
	_					SOURIAU shall not be lia due to a use of the P the Specifications issued I (professional rec	Products whi by either of
N							Country FR
						PN: 8	3D015J
					A 12-10-2	E Latest modification - by	
					Designed By:	Date:	
					TITLE	Co	mposite
<u>→</u>					SCALE NA		eral linear erances: ±
					SOURIA	WWW.SOU	RIAU.C
					FORMAT A3		URIAU D015J3
	Н	G	F	E	D	C	

