

—	D G	П	m	D	<u>о</u>



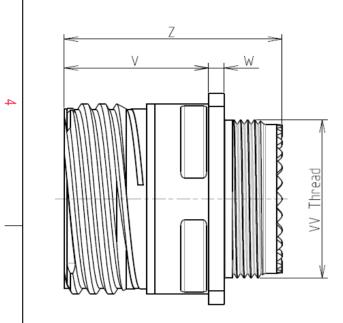

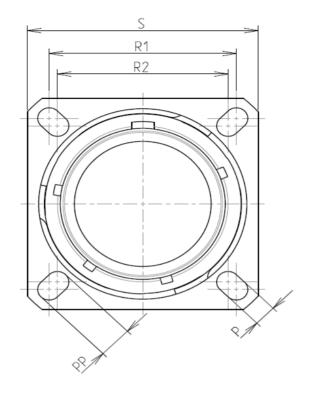

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Nickel		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	-65°C to +200°C		
-Salt Spray	: 48 hours		

8D 0

G

17

F

22

В

F

В


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


ORIENTATION : B

CONTACT LAYOUT : 17-22

CONTACT TYPE : SOCKET(500 Matings)

Е



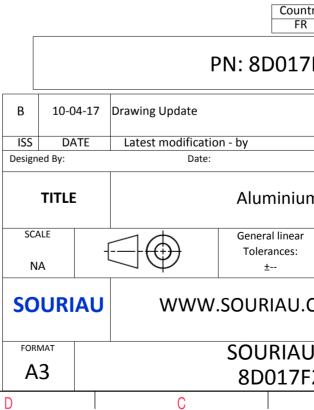

σ	A				
R			4		
S EXAMPLE			3		
any non-conform which does not content of the Parties or adation, technical n untry Juris R 7F22BB	omply with by a third party		2		
	CUSTOMER DRAWING	MOD N°			
	Im Receptacle 8D series				
ar :	NPRDS / PROJECT 859				
J.COM	This document is the property of				
U DRG N° F22BB-C	1	SHEET			
B	A		J		

F	т	G	г П	m		0	
4		Contact Layout 22				F SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cut
ω.	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for receptacle: Ty	
	F					SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	roducts v by either ommend
N						PN: 8	Cour FF
					ISS Designed B TI SCALE NA		Iminiu eral linear erances: ±
	H	G	F	E			

