
Ŧ	۵	П	m	O







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +200°C				
-Salt Spray	: 48 hours				

8D 0

G

17

-

F

22

Ρ

F

А


	r dimension
Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-22



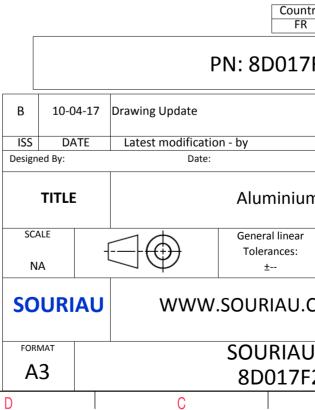

	Φ		А		
					4
	AMPLE				3
s whic er of t	non-conformit ch does not co he Parties or t on, technical n Jurisd	mply with by a third part			
FR	22PA	Not Listed			2
				MOD N°	
um	CUSTOMER DRAWING Receptacle 8D series				
ar :			PROJECT		1
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 2PA-C			SHEET 1/2	
	В		А		

r	Ŧ	G	г П	m		0	
4		Contact Layout 22				SQUARE FLANGE RECEPTACLE (TYPE O REAR MOUNTING	Panel Cut
ω	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for receptacle:	m A A 1
	F					SOURIAU shall not be due to a use of the the Specifications issue (professional r	e Products v ed by either recommend
N					B	DATE Latest modification - by	Cour FF 8D017
_					Designed F	By: Date: TLE A Ge	luminiu eneral linear Tolerances: ±
	Н	G	F	E	FORMAT A3 D		URIAU. DURIAU 3D017F

