

Ŧ	۵	П	т	<u>с</u>



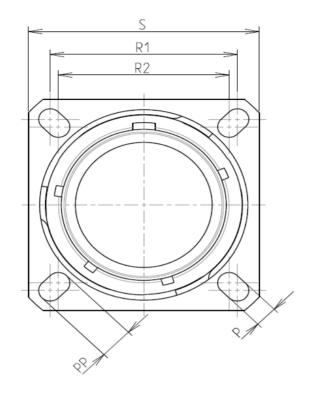



LAYOUT SHOWN AS

Keying Shown as example

L

Е

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	: -65°C to +200°C			
-Salt Spray	: 48 hours			

8D 0

G

17

F

22

Ρ

F

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 17-22

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : E



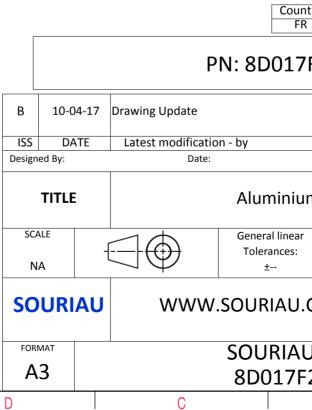

	σ		А		
					4
AS EXA	AMPLE				3
s whic er of t	non-conformit ch does not co he Parties or b on, technical no Jurisd	mply with by a third par	ty		2
7F2	22PEL				
		CUSTOME	R DRAWING	MOD N°	
um Receptacle 8D series					
ar :	NPRDS / PROJECT 859 This decument is the property of				1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 2PEL-C			SHEET 1/2	
6	B		A		J

		G	н г	m	D	0	
4		Contact Layout 22				Panel C SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Cut
	Ctc A	2#12 2#8 Triax 17-22 X Y 0 4.57				Max. thickness panel for receptacle: Type 0: fro	ont m
ω	B C D	6.32 0 0 -4.57 -6.32 0				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liable fo due to a use of the Produc the Specifications issued by eith (professional recomme	ts v her
N						PN: 8D01	our FF
_						04-17 Drawing Update ATE Latest modification - by Date:	
<u> </u>					TITL SCALE NA	E Alumin General line Tolerance ±	ear
					FORMAT A3	SOURI 8D017	AI
	Н	G	l F	E	D	C	

