

Ŧ	۵	П	m	D	0



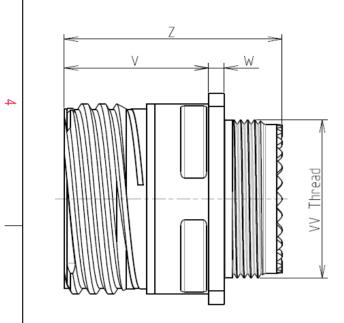

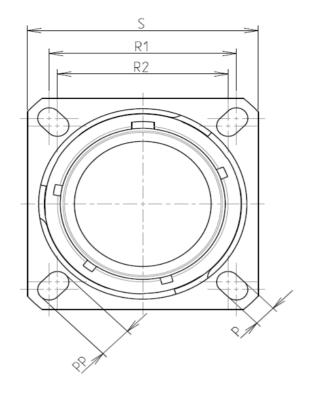

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

-Standard : Based on MIL-DTL-38999 Series III

SHELL TYPE : Square Flange Receptacle

SHELL SIZE : 17

PLATING : F = Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-			
	-Shell Material	: Aluminium	
	-Shell Plating	: Nickel	
	-Insulator	: Thermoplastic	
	-Contacts	: Copper Alloy	
	-Seals & Grommet	: Silicon Elastomer	
► -Contact Plating : Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles	
	u contacts and Accessories		
	-Temperature Range	- 65°C to +200°C	
	-Salt Spray	: 48 hours	
	-Mass	: 44.91 g ± 10%	
	BASIC SERIES:	8D 0 - 17 F 75 S D	

G

F

Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 26.97
PP 4.93±0.2
R1 26.97
R2 24.61
S 33.3±0.3
V 20.83+0/-1.25
W 2.1/2.5
Z 31.5 Max
VV THREAD M25x1-6g


ORIENTATION : D

CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment Cour

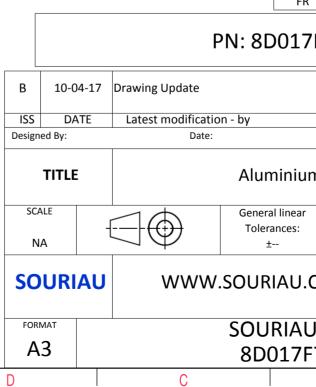

σ		Þ		
R				4
S EXAMPLE				3
	mply with by a third part otice.) diction & Conti			0
7F75SD	Not Listed			2
			MOD N°	
um Receptac	CUSTOMER DRAWING Receptacle 8D series NPRDS / PROJECT			
J.COM	859 This document is the property of SOURIAU it must not be reproduced or			
U DRG N°		cated without per	mission SHEET	
2F75SD-C B		A	1/2]
5	I	/ \		

ſ		۵ ا	н г	m	D	0	
		Contact Layout					anel Cuto
4		75			The second secon	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			¥	Max. thickness panel for receptacle: Type	Ø⊺ pe 0: front m
ى	В	0 -4.75				Dim ØA ØAA R1 ØT	
	ŀ					SOURIAU shall not be lia	
N						due to a use of the Pr the Specifications issued b (professional reco	oy either
					B 10-04	-17 Drawing Update	D017
					ISS DAT Designed By: TITLE	Date:	ıminiu
_					SCALE NA		eral linear erances: ±
					FORMAT A3	SOL	RIAU. JRIAU 0017F
l	Н	G	F	E	D	C	

