

т	۵	П	m	0



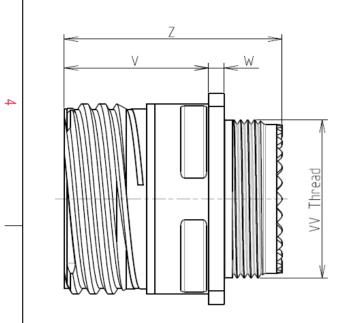

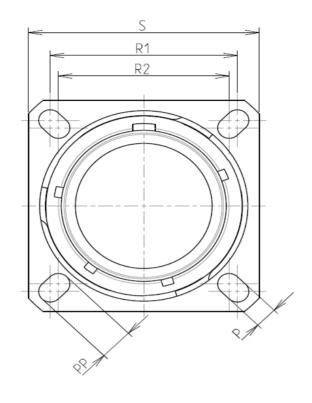

LAYOUT SHOWN AS

Keying Shown as example

ΙL

Е

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium		
	-Shell Plating	: Nickel		
2	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered without Souriau contacts			
	-Temperature Range	: -65°C to +200°C		
	-Salt Spray	: 48 hours		
_	-Mass	: 30.91 g ± 10%		

8D 0

G

17

F

75

S

F

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


Delivered W/O Contacts

CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : E





	Ξ		A		
					4
					3
IS EX4	AMPLE				
whic er of t	non-conformit ch does not co he Parties or t on, technical n	mply with by a third part otice.)			
intry R	Jurisd	liction & Cont Not Listed	rol List		2
7F7	75SEL				
		CUSTOME		MOD N°	
um	Receptacl				
ar	NPRDS / PROJECT				
			59		1
I.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°	1		SHEET	
F75	SEL-C		^	1/2	J
	В	I	A		

	Ŧ	ര	וד	m	D	0	
		Contact Layout 75				Panel SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING R1	Cuto
4					2		
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			<u> </u>	Max. thickness panel for receptacle: Type 0: fro	ront mo
ω	В	0 -4.75				Dim ØA ØAA R1 ØT	
	-				[
						SOURIAU shall not be liable f due to a use of the Produc the Specifications issued by eit (professional recomm	ther one of the second se
N						PN: 8D017	
					B 10-04- ISS DATE Designed By:	17 Drawing Update Latest modification - by Date:	
_					SCALE NA	Alumir General lir Tolerance ±	near
					SOURIA	U WWW.SOURIA SOURI	
	Н	G	F	E	A3	8D01	7F
	П	I G	I F				

