


T	Q	нт — — — — — — — — — — — — — — — — — — —	m	0

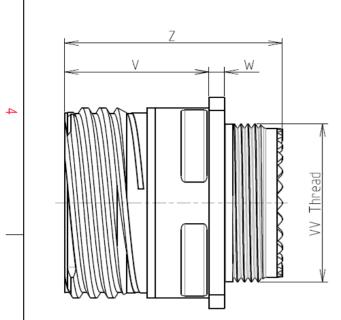

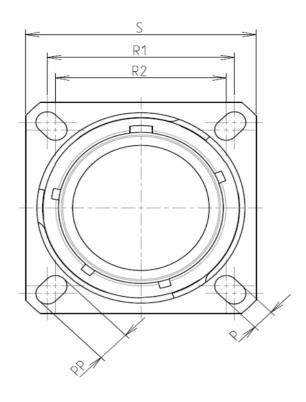



Keying Shown as example

CHARACTERISTICS

ω

 \sim


-Mass

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel
-Shell Plating	: Passivated
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souria	u contacts and Accessories
-Temperature Range	: -65°C to +200°C
-Salt Spray	: 500 hours

: 63.16 g ± 10%

Connector dimension							
Dim	Nominal						
Р	3.25±0.2						
PP	4.93±0.2						
R1	26.97						
R2	24.61						
S	33.3±0.3						
V	20.83+0/-1.25						
W	2.1/2.5						
Z	31.5 Max						
VV THREAD	M25x1-6g						

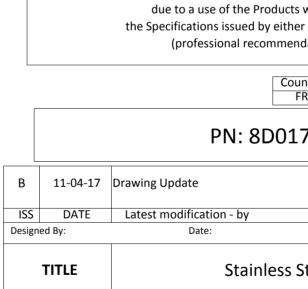

	BASIC SERIES:	8D 0	- 17	К	08	А	с			SCALE	L	$\neg \phi$	General lin Tolerance	
_	SHELL TYPE : Square Flange R	Receptacle								NA	1	$\exists \Psi$	±	
	CONTACT TYPE : Standard C	rimp Contact							ORIENTATION : C	SOURI	ΔIJ	\\/\/\/\/	.SOURIA	uс
	SHELL SIZE : 17							CONTACT TYPE : I	PIN(500 Matings)	5001				0.0
	PLATING : K = Passivat	ted						CONTAC	T LAYOUT : 17-08	FORMAT		I	SOURI	AU
					•					A3			8D01	7K(
·	Н	G				F		Е		D		С		

0		Β		Þ				
	I]			
	- //	T	0		4			
		Ka						
			1					
			45					
		10/2						
			7					
LAY	OUT SHOWN AS EXA	AMPLE			3			
	not be liable for any i of the Products whic							
the Specifications	issued by either of t onal recommendatio	he Parties or	by a third party					
Country Jurisdiction & Control List								
FR Not Listed								
PN: 8D017K08AC								
rawing Update					1			
Latest modificatio	n - by		CUSTOMER DRA	MOD N°	<u> </u>			
Date:					-			
		ei Recepta	acle 8D series					
General linear NPRDS / PROJECT Tolerances: 859								
This document is the property of								
WWW.SOURIAU.COM it must not be reproduced or communicated without permission								
SOURIAU DRG N° SHEET								
8D017K08AC-C 1/2 C B A								
U	Ι	D	I	~				

		G	нт —	m		0	
		Contact Layout					Panel Cutor
4	-x ($ \begin{array}{c} \bullet^{+Y} \\ \bullet^{A} \\ \bullet^{B} \\ \bullet^{B} \\ \bullet^{B} \\ \bullet^{B} \\ \bullet^{C} \\ \bullet^{+X} \\ \bullet^{C} \\ \bullet^{C} \\ \bullet^{+X} \\ \bullet^{C} \\ \bullet^{C} \\ \bullet^{-Y} \\ \bullet^{-Y} \\ \bullet^{C} \\ \bullet^{-Y} \\ \bullet^{-Y}$			Ter -	SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
	Conta position A B C D	(mm) (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.086 (2.18) +.220 (5.84) 078 (1.98) +.094 (2.39) 216 (5.49)			¥	Max. thickness panel for receptad	de: Type 0: front mo
ယ	size no. co	230 (5.84)078 (1.98) 128 (3.25) +.086 (2.18)				ç	Dim ØA ØAA R1 ØT
						SOURIAU shall not b due to a use of th the Specifications issu (professional	he Products w
2							Count FR : 8D017
					B 11-04-1 ISS DATE Designed By:	7 Drawing Update Latest modification - I Date:	by
-					TITLE SCALE NA		General linear Tolerances: ±
					FORMAT A3	S	OURIAU
	Н	G	F	E	D	С	8D017K

