


| T | Q | П | m | 0 |
|---|---|---|---|---|
|   |   |   |   |   |

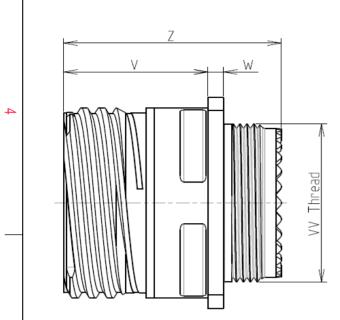

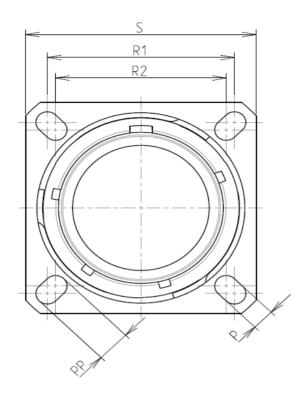



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material                                  | : Stainless Steel                            |  |  |
|--|--|--|--|
| -Shell Plating                                   | : Passivated                                 |  |  |
| -Insulator                                       | : Thermoplastic                              |  |  |
| -Contacts  | : Copper Alloy                               |  |  |
| -Seals & Grommet                                 | : Silicon Elastomer                          |  |  |
| -Contact Plating                                 | : Gold over copper Alloy $0.8 \mu m$ minimum |  |  |
| -Durability                                      | : 500 Mating cycles                          |  |  |
| -Delivered with Souriau contacts and Accessories |  |  |  |
| -Temperature Range                               | -65°C to +200°C                              |  |  |
| -Salt Spray                                      | : 500 hours                                  |  |  |

: 63.16 g ± 10%

8D 0

G

17

Κ

08

А

F

D


| Connector dimension |               |  |  |
|---------------------|---------------|--|--|
| Dim                 | Nominal       |  |  |
| Р                   | 3.25±0.2      |  |  |
| PP                  | 4.93±0.2      |  |  |
| R1                  | 26.97         |  |  |
| R2                  | 24.61         |  |  |
| S                   | 33.3±0.3      |  |  |
| V                   | 20.83+0/-1.25 |  |  |
| W                   | 2.1/2.5       |  |  |
| Z                   | 31.5 Max      |  |  |
| VV THREAD           | M25x1-6g      |  |  |


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-08



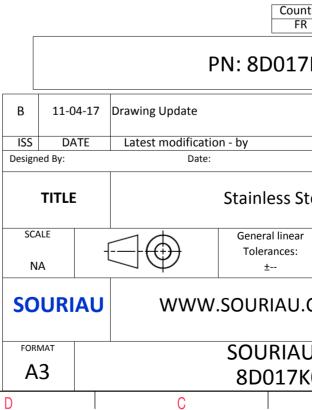

|   | Φ  |                             | A                       |        |   |
|---|--|-----------------------------|-------------------------|--------|---|
|   |  |                             |                         |        | 4 |
| S EXA   | AMPLE  |                             |                         |        | 3 |
| s which<br>er of t<br>indation<br>untry<br>FR | non-conformit<br>ch does not co<br>che Parties or b<br>on, technical n<br>Jurisd                                       | mply with<br>by a third par | ty                      |        | 2 |
|   |  |                             |                         |        |   |
|   |  | CUSTOME                     | R DRAWING               | MOD N° |   |
| Stee  | Steel Receptacle 8D series   |                             |                         |        |   |
| ar  |  |                             | / PROJECT<br>5 <b>9</b> |        | 1 |
| J.CC  | .COM<br>This document is the property of<br>SOURIAU<br>it must not be reproduced or<br>communicated without permission |                             |                         |        |   |
|   | DRG N°<br>8AD-C  |                             |                         | SHEET  |   |
| KU0   | B  |                             | A                       |        | J |
|   |  |                             |                         |        |   |

|   |  | ۵  | гт – | m |                                       | 0   |                            |
|---|--|--|------|---|---------------------------------------|---|----------------------------|
|   |  | Contact Layout   |      |   |                                       |   | Panel Cutor                |
| 4 | -x (   | $ \begin{array}{c}                                     $   |      |   | λ<br>Σ                                | SQUARE FLANGE RECEPTACLE (TYPE 0)<br>REAR MOUNTING  |                            |
|   | Conta<br>position<br>A<br>B<br>C<br>D<br>E           | Contacts           (Insert arrangement 17-8)           ct         Location           X-axis         Y-axis           (mm)         (mm)           +.000 (0.00)         +.236 (5.99)           +.128 (3.25)         +.086 (2.18) |      |   | <u> </u>                              | Max. thickness panel for receptacle: Typ  | Ø⊺<br>rpe 0: front mod     |
| ω | F<br>G<br>H<br>Shell Arrangement Nur<br>size no. coi | 230 (5.84)078 (1.98)   |      |   |                                       | Dim<br>ØA<br>ØAA<br>R1<br>ØT  |                            |
|   |  |  |      |   |                                       | SOURIAU shall not be lia<br>due to a use of the Pr<br>the Specifications issued b<br>(professional reco | Products wh<br>by either o |
| N |  |  |      |   |                                       | PN: 8   | Countr<br>FR               |
|   |  |  |      |   | B 11-04-1<br>ISS DATE<br>Designed By: | 7 Drawing Update<br>Latest modification - by<br>Date:   |                            |
| - |  |  |      |   | TITLE<br>SCALE<br>NA                  |   | eral linear<br>lerances:   |
|   |  |  |      |   | SOURIA                                |   |                            |
|   |  | 1  | 1    |   | A3                                    | 8D  | URIAU<br>0017K             |
|   | Н  | G  | F    | E | D                                     | C   |                            |

