

—	D D	нт – – – – – – – – – – – – – – – – – – –	m	O



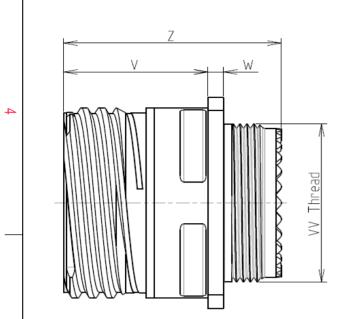

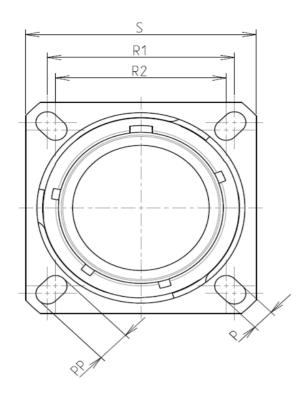

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III

-Shell Materi	al : St	ainless Steel			
-Shell Plating	: Pa	assivated			
-Insulator	: Tł	nermoplastic			
-Contacts	: Co	opper Alloy			
-Seals & Gror	mmet : Si	licon Elastomer			
-Contact Plat	ing : G	old over copper Alloy 0.8µm minimum			
-Durability	: 50	00 Mating cycles			
-Delivered with Souriau contacts and Accessories					
Tomporatur	o Pango				


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	26.97			
R2	24.61			
S	33.3±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M25x1-6g			


ORIENTATION : N

CONTACT LAYOUT : 17-20

CONTACT TYPE : SOCKET(500 Matings)

Е



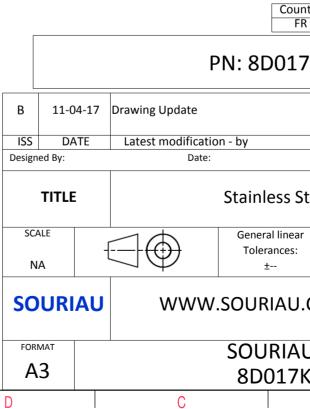

-Temperature Range : -65°C to +200°C -Salt Spray : 500 hours BASIC SERIES: 8D 0 SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : K = Passivated

Н

SHELL SIZE : 17

17

G

Κ

20

S

F

Ν

 \sim

ယ

	Ξ		Þ			
					4	
S EX4	AMPLE				3	
whic er of t idatic	non-conformit ch does not co he Parties or t on, technical n	mply with by a third par otice.)				
Intry R	Jurisa	iction & Cont Not Listed	troi List		2	
7K20SN						
		CUSTOME	R DRAWING	MOD N°		
Stee	Steel Receptacle 8D series					
ar	NPRDS / PROJECT 859					
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N° 0SN-C			SHEET	-	
IXΖ	B		A	,	J	

	Ŧ	۵	<u>п</u>	m	D	0
4	(Contact Layout 20*			τ	SQUARE FLANGE RECEPTACLE (TYPE 0)
		16#22D	_		4	
		17-20	-			ØT_
	Ctc	X Y	-			Max. thickness panel for receptacle: Type 0: front m
	AB	0 5.51 3.17 0	-			
	C	0 -5.51	-			Dim
	D	-3.17 0	-			ØA
ω	1	4.16 7.06	-			ØAA
	2	4.29 4.29	1			R1 ØT
	3	7.11 4.03	1			
	4	8.05 1.4				
	5	8.05 -1.4				
-	6	7.11 -4.03	-			
	7	4.29 -4.29	-			SOURIAU shall not be liable for a
	8	4.16 -7.06	-			due to a use of the Products v the Specifications issued by either
	9	-4.16 -7.06	-			(professional recommend
	10	-4.29 -4.29	-			
N	11	-7.11 -4.03	-			Coun
10	12	-8.05 -1.4 -8.05 1.4	-			
	13	-7.11 4.03	-			PN: 8D017
	15	-4.29 4.29	-			111.00017
	16	-4.16 7.06	-		B 11-04-	-17 Drawing Update
					ISS DAT Designed By:	E Latest modification - by Date:
					TITLE	Stainless S
_					SCALE NA	General linear Tolerances:
					SOURIA	WWW.SOURIAU.
					FORMAT A3	SOURIAI 8D017F
l	Н	G	F	E	7 D	C
	•••		•	_	_	

